



Approvazione del Sistema di Garanzia di Qualità della Produzione Production quality assurance system approval

Certificato N. **0425-MED-004456-00**
Certificate No.

Secondo l'Allegato V della Direttiva Europea 93/42/CEE (recepita con il Dlg n. 46 del 24/02/1997)
According to Annex V of EC Directive 93/42/CEE (as transposed into Dlg no. 46 issued on 24/02/1997)

ORGANISMO NOTIFICATO / NOTIFIED BODY

ICIM S.p.A. - Identification number: 0425
Piazza Don Enrico Mapelli, 75 - 20099 Sesto San Giovanni (MI) - ITALY

VISTO L'ESITO DELLE VERIFICHE CONDOTTE IN CONFORMITÀ ALL'ALLEGATO V DELLA DIRETTIVA EUROPEA 93/42/CEE
DICHIARA CHE IL SISTEMA DI GARANZIA DI QUALITÀ DELLA PRODUZIONE ATTUATO DA
ON THE BASIS OF THE ASSESSMENT PERFORMED ACCORDING TO ANNEX V OF EC DIRECTIVE 93/42/CEE DECLARES
THAT THE PRODUCTION QUALITY ASSURANCE SYSTEM ENFORCED BY:

PRO-ACTIVE S.R.L.

Sede Legale e Operativa
Viale del Commercio, 12 - 45100 Rovigo (RO)
Italia

PER I SEGUENTI TIPI DI PRODOTTI, PROCESSI, SERVIZI
FOR THE FOLLOWING KINDS OF PRODUCTS, PROCESSES, SERVICES
Dispositivi per canalizzazione fluidi ed accessori.
Dispositivi per infusione trasfusione. Siringhe sterili.
Type of device
Device for fluid canalization and accessories.
Device for infusion and transfusion. Sterile syringes

È CONFORME AI REQUISITI / IS IN COMPLIANCE WITH REQUIREMENTS
Allegato V della Direttiva Europea 93/42/CEE
Annex V of EC Directive 93/42/CEE

Per l'identificazione dei modelli di prodotto vedere l'Allegato I / For identification of the model type see Annex

Il presente Certificato è da ritenersi valido solo se accompagnato dal relativo Allegato / This Certificate is valid only with the relative Annex

Gaetano Trizio
Rappresentante Direzione / Management Representative

ICIM S.p.A.

PRIMA EMISSIONE FIRST ISSUE	EMISSIONE CORRENTE CURRENT ISSUE	DATA DI SCADENZA EXPIRING DATE
25/05/2021	25/05/2021	26/05/2024

ICIM S.p.A. - Piazza Don Enrico Mapelli, 75 - 20099 Sesto San Giovanni (MI)

0897/CA_01_17

CE Certificate (93/42/EEC Directive)

ISO 13485 Certificate

Il certificato è stato rilasciato in precedenza da un altro CAB
The certificate has been issued previously by another CAB



CERTIFICATO n. **10462/1**
CERTIFICATE No.

SI CERTIFICA CHE IL SISTEMA DI GESTIONE PER LA QUALITÀ DI
WE HEREBY CERTIFY THAT THE QUALITY MANAGEMENT SYSTEM OPERATED BY

PRO-ACTIVE S.R.L.

UNITÀ OPERATIVA / OPERATIVE UNIT

Viale del Commercio, 12 - 45100 Rovigo (RO)
Italia

È CONFORME ALLA NORMA / IS IN COMPLIANCE WITH THE STANDARD

UNI CEI EN ISO 13485:2016

Sistema di Gestione per la Qualità / Quality Management System

PER LE SEGUENTI ATTIVITÀ / FOR THE FOLLOWING ACTIVITIES

Produzione ed immissione in commercio a proprio marchio di set sterili per trasfusione/infusione e relativi accessori. Commercializzazione a proprio marchio di componenti per dispositivi medici di canalizzazione di sostanze liquide. Commercializzazione di dispositivi medici monouso.

Manufacture and place on the market at own brand of sterile transfusion/infusion set and related accessories. Trading at own brand of medical devices components for liquid substances channeling. Trading of single use medical devices.

Riferirsi alla documentazione del Sistema di Gestione per la Qualità concernente per l'applicabilità dei requisiti della norma di riferimento.
Refer to the documentation of the Quality Management System for details of Application to reference standard requirements.

Il presente certificato è soggetto al rispetto del documento ICIM "Regolamento per la certificazione dei sistemi di gestione" e al relativo Schema specifico.
The use and the validity of this certificate shall satisfy the requirements of the ICIM document "Rules for the certification of company management systems" and Specific Schema.

Per informazioni puntuali e aggiornate circa eventuali variazioni intervenute negli ultimi 12 mesi della certificazione di cui al presente certificato, si prega di contattare il n° telefonico +39 02 752341 o indirizzo e-mail info@icim.it.
For timely and updated information about any changes in the certification status referred to in this certificate, please contact the number +39 02 752341 or email address info@icim.it.

DATA EMISSIONE FIRST ISSUE	EMISSIONE CORRENTE CURRENT ISSUE	DATA DI SCADENZA EXPIRING DATE
28/07/2006	28/07/2021	27/07/2024

Vincenzo Delacqua
Rappresentante Direzione / Management Representative
ICIM S.p.A.
Piazza Don Enrico Mapelli, 75 - 20099 Sesto San Giovanni (MI)
www.icim.it

0897/CA_01_17



55Q N° 004 A



www.cisq.com
























CISQ è la Federazione Italiana di Organismi di Certificazione del Sistema di Gestione Aziendale. CISQ is the Italian Federation of management system Certification Bodies.

INDEX



















	I.V. Administration Sets	4
	I.V. Administration Sets for pump	7
	I.V. Administration Sets for gravity with burette	7
	I.V. Administration Sets for gravity with large bore	8
	Infusion and Transfusion Accessories (caps, spikes, etc.)	9
	3-Way Stopcocks and Manifolds	10
	Blood giving sets	11
	Micro-bore extension lines	12
	Small bore extension lines	16
	Standard bore extension lines	22
	Extension lines with flow controller and in-line filter	26
	TIVA sets and multi-lumen extension lines	30
	Syringes	31
	Decontaminating adhesive-coated mats	33



Reference	Description	Features	Packing
	Standard I.V. set 	   20  15 µm STERILE EO  0425	Carton (29x29x49 cm) 125 pcs. Full pallet (80x120x220 cm) 42 cartons
IFB004AA150	PVC DEHP-free I.V. Administration set 150 cm long composed by vented spike with air-inlet (with hydrophobic filter and ON/OFF cap) and with standard dropper, drip-chamber with 15 µm solution filter, tube Ø 3,0 x 4,1 mm, roller clamp, male luer lock connector with cap.		
available variants			
IFB004AA180	180 cm long		
IFB004AA210	210 cm long		
IFB004AB150	with rotating male luer lock distal connector	rotating male LL	
IFB004AB180	with rotating male luer lock distal connector and 180 cm long		
IFB004AB210	with rotating male luer lock distal connector and 210 cm long		
IFC004AA150	<u>totally PVC-free</u>		
IFC004AA180	<u>totally PVC-free</u> and 180 cm long		
IFC004AA210	<u>totally PVC-free</u> and 210 cm long		
IFC004AB150	<u>totally PVC-free</u> with rotating male luer lock distal connector		
IFC004AB180	<u>totally PVC-free</u> with rotating male luer lock distal connector and 180 cm long		
IFC004AB210	<u>totally PVC-free</u> with rotating male luer lock distal connector and 210 cm long	rotating male LL	
	I.V. set with flashball 	   20  15 µm STERILE EO  0425	Carton (29x29x49 cm) 100 pcs. Full pallet (80x120x220 cm) 42 cartons
IFB009AA150	PVC DEHP-free I.V. Administration set 150 cm long composed by vented spike with air-inlet (with hydrophobic filter and ON/OFF cap) and with standard dropper, drip-chamber with 15 µm solution filter, tube Ø 3,0 x 4,1 mm, roller clamp, latex-free flashball and male luer lock connector with cap.		
available variants			
IFB009AA180	180 cm long		
IFB009AA210	210 cm long		
IFC009AA150	<u>totally PVC-free</u>		
IFC009AA180	<u>totally PVC-free</u> and 180 cm long		
IFC009AA210	<u>totally PVC-free</u> and 210 cm long		
	I.V. set with injection port 	   20  15 µm STERILE EO  0425	Carton (29x29x49 cm) 100 pcs. Full pallet (80x120x220 cm) 42 cartons
IFB004BA180	PVC DEHP-free I.V. Administration set 180 cm long composed by vented spike with air-inlet (with hydrophobic filter and ON/OFF cap) and with standard dropper, drip-chamber with 15 µm solution filter, tube Ø 3,0 x 4,1 mm, roller clamp, standard injection port finger protective male luer lock connector with cap.		
available variants			
IFB004BA210	210 cm long		
IFB004DA180	with needle-free injection port		
IFB004DA210	with needle-free injection port and 210 cm long		
IFB004BB180	with rotating male luer lock distal connector	rotating male LL	
IFB004BB210	with rotating male luer lock distal connector and 210 cm long		
IFB004DB180	with needle-free injection port and rotating male luer lock distal connector		
IFB004DB210	with needle-free injection port, rotating male luer lock distal connector and 210 cm long		
IFC004BA180	<u>totally PVC-free</u>		
IFC004BA210	<u>totally PVC-free</u> and 210 cm long		
IFC004DA180	<u>totally PVC-free</u> with needle-free injection port		
IFC004BB180	<u>totally PVC-free</u> with rotating male luer lock distal connector and 180 cm long		
IFC004BB210	<u>totally PVC-free</u> with rotating male luer lock distal connector and 210 cm long		
IFC004DB180	<u>totally PVC-free</u> with needle-free injection port and rotating male luer lock distal connector	rotating male LL	

Caption:
























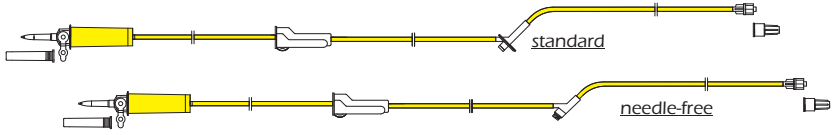





Reference	Description	Features	Packing
<p>Safe I.V. set</p>  <p>IFB005AC180 PVC DEHP-free I.V. Administration sets 180 cm long composed by Vented spike with air-inlet (with hydrophobic filter and ON/OFF cap) and with standard dropper, drip-chamber with 10 µm solution filter and air-stop system that block the air incoming when the fluid in the bottle or bag end, tube Ø 3,0 x 4,1 mm, roller clamp, male luer lock connector with cap with hydrophobic membrane to allow safe priming avoiding accidental liquid leakage.</p> <p>available variants</p> <p>IFB005BC210 210 cm long with 3-way stopcock</p> <p>IFB005CC180 with Y injection port</p> <p>IFB005DC180 with Y needle-free injection port</p>	 <p>STERILE EO   0425</p>	<p>Carton (29x29x49 cm) 100 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>	
<p>I.V. set with 3-way stopcock</p>  <p>IFB011AA180 PVC DEHP-free I.V. Administration sets composed by vented spike with air-inlet (with hydrophobic filter and ON/OFF cap) and with standard dropper, drip-chamber with 15 µm solution filter, tube Ø 3,0 x 4,1 mm, - roller clamp, lipid-resistant 3-way stopcock with cap, male luer lock connector with cap.</p> <p>available variants</p> <p>IFB011AB180 with rotating male luer lock distal connector</p> <p>IFC011AA180 <u>totally PVC-free</u></p> <p>IFC011AB180 <u>totally PVC-free and with rotating male luer lock distal connector</u></p>	 <p>STERILE EO   0425</p>	<p>Carton (29x29x49 cm) 100 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>	
<p>I.V. set with flow controller</p>  <p>IFB002AA200 PVC DEHP-free I.V. Administration sets composed by vented spike with air-inlet (with hydrophobic filter and ON/OFF cap) and with standard dropper, drip-chamber with 15 µm solution filter, tube Ø 3,0 x 4,1 mm, robert clamp, single scale flow controller (0-250 ml), Y injection port (finger protective), male luer lock connector with cap.</p> <p>available variants</p> <p>IFB002DA200 with double scale flow controller</p> <p>IFB002CA180 cm 180 with roller clamp (instead of robert clamp)</p> <p>IFB002BA180 cm 180 with roller clamp (instead of robert clamp) and double scale flow controller</p> <p>IFB008BE180 cm 180 without injection port and with double scale flow controller and distal luer lock check-valve</p> <p>IFB008CA180 cm 180 without injection port and with double scale flow controller and 3-way stopcock</p> <p>IFC002CA180 <u>totally PVC-free</u> cm 180 with roller clamp (instead of robert clamp)</p> <p>IFC002BA180 <u>totally PVC-free</u> cm 180 with roller clamp (instead of robert clamp) and double scale flow controller</p>	 <p>STERILE EO   0425</p>	<p>Carton (29x29x49 cm) 100 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>	
<p>I.V. set with in-line filter</p>  <p>IFB000AA190 PVC DEHP-free I.V. Administration sets 190 cm long composed by vented spike with air-inlet (with hydrophobic filter and ON/OFF cap) and with standard dropper, drip-chamber without solution filter, tube Ø 3,0 x 4,1 mm, roller clamp, in-line 0,2 µm filter (10 cm²), Y injection port (finger protective), male luer lock connector with cap</p> <p>available variants</p> <p>IFB000BA190 with 1,2 µm filter (instead of 0,2 µm filter)</p> <p>IFB000AA160 cm 160</p> <p>IFB000CA190 with needle-free Y injection port</p> <p>IFC000AA190 <u>totally PVC-free</u></p> <p>IFC000BA190 <u>totally PVC-free</u> with 1,2 µm filter (instead of 0,2 µm filter)</p> <p>IFC000CA190 <u>totally PVC-free</u> with needle-free Y injection port</p>	 <p>STERILE EO   0425</p>	<p>Carton (29x29x49 cm) 100 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>	

Caption:

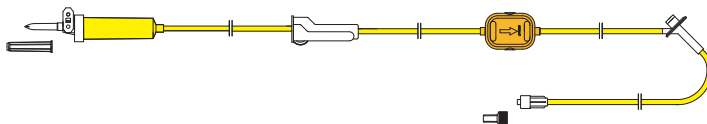 Sterilized by EtO	 Drops per ml	 Latex-free	 DEHP-free	 Light protective	 Mesh filter	 Membrane filter	 Air-stop system	 Fluid-stop system
--	--	--	---	--	---	---	---	---






Reference	Description	Features	Packing
IFB004EA150 available variants IFC004EA150	Micro-dropper I.V. set  PVC DEHP-free I.V. Administration set 150 cm long composed by vented spike with air-inlet (with hydrophobic filter and ON/OFF cap) and with micro-dropper, drip-chamber with 15 µm solution filter, tube Ø 3,0 x 4,1 mm, roller clamp, male luer lock connector with cap. <u>totally PVC-free</u>	    STERILE EO  0425	Carton (29x29x49 cm) 125 pcs. Full pallet (80x120x220 cm) 42 cartons
IFB012AA150 available variants IFB012AA180 IFC012AA150 IFC012AA180	I.V. set for photosensitive drugs  PVC DEHP-free I.V. Administration set 150 cm long for photosensitive drugs composed by vented spike with air-inlet (with hydrophobic filter and ON/OFF cap) and with standard dropper, opaque drip-chamber with 15 µm solution filter, opaque tube Ø 3,0 x 4,1 mm, roller clamp and male luer lock connector with cap. 180 cm long <u>totally PVC-free</u> <u>totally PVC-free and 180 cm long</u>	     STERILE EO  0425	Carton (29x29x49 cm) 100 pcs. Full pallet (80x120x220 cm) 42 cartons
IFB001AA180 available variants IFB001AA210 IFB001AB180 IFB001AB210 IFB001DA180 IFB001DA210 IFB001DB180 IFB001DB210 IFC001AA180 IFC001AA210 IFC001DB180 IFC001DB210	I.V. set for photosensitive drugs with injection port  PVC DEHP-free I.V. Administration set 180 cm long for photosensitive drugs composed by vented spike with air-inlet (with hydrophobic filter and ON/OFF cap) and with standard dropper, opaque drip-chamber with 15 µm solution filter, opaque tube Ø 3,0 x 4,1 mm, roller clamp, standard injection port finger protective male luer lock connector with cap. 210 cm long with rotating male luer lock distal connector with rotating male luer lock distal connector and 210 cm long with needle-free injection port with needle-free injection port and 210 cm long with needle-free injection port and rotating male luer lock distal connector with needle-free injection port, rotating male luer lock distal connector and 210 cm long <u>totally PVC-free</u> <u>totally PVC-free and 210 cm long</u> <u>totally PVC-free with needle-free injection port</u> <u>totally PVC-free with needle-free injection port and rotating male luer lock distal connector</u>	     STERILE EO  0425	Carton (29x29x49 cm) 100 pcs. Full pallet (80x120x220 cm) 42 cartons
IFB013AA190 available variants IFB013BA190 IFB013AA160 IFB013CA190 IFC013AA190 IFC013BA190 IFC013CA190	I.V. set for photosensitive drugs with in-line filter  PVC DEHP-free I.V. Administration sets 190 cm long for photosensitive drugs composed by vented spike with air-inlet (with hydrophobic filter and ON/OFF cap) and with standard dropper, drip-chamber without solution filter, tube Ø 3,0 x 4,1 mm, roller clamp, in-line 0,2 µm filter (10 cm ²), Y injection port (finger protective), male luer lock connector with cap with 1,2 µm filter (instead of 0,2 µm filter) cm 160 with needle-free Y injection port <u>totally PVC-free</u> <u>totally PVC-free with 1,2 µm filter (instead of 0,2 µm filter)</u> <u>totally PVC-free with needle-free Y injection port</u>	     STERILE EO  0425	Carton (29x29x49 cm) 100 pcs. Full pallet (80x120x220 cm) 42 cartons

Caption:




INFU-PRO - I.V. Administration Sets

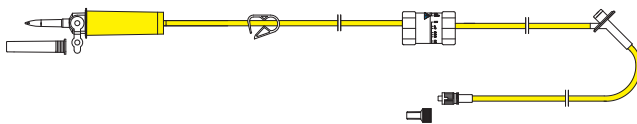

Reference	Description	Features	Packing
	<p>I.V. set for photosensitive drugs with flow controller</p> 		<p>Carton (29x29x49 cm) 100 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
IFB007CA200	PVC DEHP-free I.V. Administration sets for photosensitive drugs composed by vented spike with air-inlet (with hydrophobic filter and ON/OFF cap) and with standard dropper, drip-chamber with 15 µm solution filter, opaque tube Ø 3,0 x 4,1 mm, robert clamp, single scale flow controller (0-250 ml), Y injection port (finger protective), male luer lock connector with cap.		
available variants			
IFB007DA200	with double scale flow controller		
IFB007AA190	cm 190 with roller clamp (instead of robert clamp)		
IFB007AB190	cm 190 with roller clamp (instead of robert clamp) and distal rotating luer lock		
IFB007BA180	cm 180 with roller clamp (instead of robert clamp) and double scale flow controller		
IFB014BE180	cm 180 without injection port and with double scale flow controller and distal luer lock check-valve		
IFB014CA180	cm 180 without injection port and with double scale flow controller and 3-way stopcock		
IFC007AA190	<u>totally PVC-free</u> cm 190 with roller clamp (instead of robert clamp)		
IFC007AA290	<u>totally PVC-free</u> cm 290 with roller clamp (instead of robert clamp)		
IFC007AB190	<u>totally PVC-free</u> cm 190 with roller clamp (instead of robert clamp) and distal rotating luer lock		
IFC007AB290	<u>totally PVC-free</u> cm 290 with roller clamp (instead of robert clamp) and distal rotating luer lock		
IFC007BA180	<u>totally PVC-free</u> cm 180 with roller clamp (instead of robert clamp) and double scale flow controller		



INFU-PRO - I.V. Administration Sets for volumetric pump



Reference	Description	Features	Packing
	<p>I.V. set for volumetric pump</p> 		<p>Carton (29x29x49 cm) 100 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
IFB015AC250	PVC DEHP-free I.V. Administration set 250 cm long composed by vented spike with air-inlet (with hydrophobic filter and ON/OFF cap) and with standard dropper- drip-chamber (B.Braun model) with 10 µm solution filter and air-stop system that block the air incoming when the fluid in the bottle or bag end, tube Ø 2,9 x 4,1 mm, roller clamp, silicon segment with adapter for B.Braun pump, male luer lock connector with cap with hydrophobic membrane to allow safe priming avoiding accidental liquid leakage.		
available variants			
IFC015AC250	<u>totally PVC-free</u>		

BURET-PRO - I.V. Administration Sets with burette




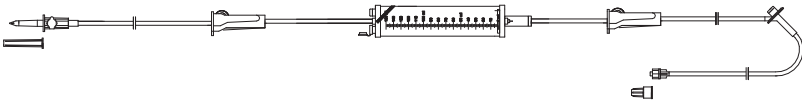


















Reference	Description	Features	Packing
	<p>I.V. set for gravity with burette</p> 		<p>Carton (29x29x49 cm) 30 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
BFB000AA180	PVC DEHP-free I.V. Administration set 180 cm long with burette composed by vented spike with hydrophobic filter and ON/OFF cap, tube (15 cm long, Ø 2,9 x 4,1 mm), 1st roller clamp, graduated burette with injection port, air inlet with on/off cap and floating valve, drip chamber with micro-dropper and 15 µm solution filter, tube (150+30cm long, Ø 3,0 x 4,1 mm), 2nd roller clamp, Y-injection point (finger protective), male LL connector with cap.		
available variants			
BFB001AA180	100 ml burette (instead of 150 ml)		

Caption:

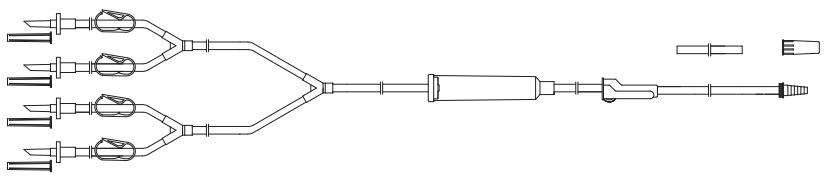
































URO-PRO - I.V. Administration Sets with large bore

Reference	Description	Features	Packing
UFB000AO180	<p>1-way irrigation set</p>  <p>PVC DEHP-free irrigation set 180 cm long composed by non-vented spike, tube (Ø 4,8 x 6,8 mm), big drip chamber with standard dropper and without filter, big roller clamp, urological standard connector with cap. Supplied with a PVC tube (Ø 5,8 x 9,0 mm) 10 cm long.</p>	   <p>20</p> <p>STERILE EO  0425</p>	<p>Carton (29x29x49 cm) 40 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
UFB000BA180	<p>Hi-flow infusion set</p>  <p>PVC DEHP-free irrigation set 180 cm long composed by non-vented spike, tube (Ø 4,8 x 6,8 mm), big drip chamber with standard dropper and without filter, big roller clamp, robert clamp and male luer lock connector with cap.</p>	   <p>20</p> <p>STERILE EO  0425</p>	<p>Carton (29x29x49 cm) 40 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
UFB001AO180	<p>2-way irrigation set</p>  <p>PVC DEHP-free irrigation set 180 cm long composed by two non-vented spikes, two robert clamps, Y connector, tube (Ø 4,8 x 6,8 mm), big drip chamber with standard dropper and without filter, big roller clamp, urological standard connector with cap. Supplied with a PVC tube (Ø 5,8 x 9,0 mm) 10 cm long.</p>	   <p>20</p> <p>STERILE EO  0425</p>	<p>Carton (29x29x49 cm) 30 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
UFB002AO200	<p>4-way irrigation set</p>  <p>PVC DEHP-free irrigation set 200 cm long composed by four non-vented spikes, four robert clamps, two Y connectors, tube (Ø 4,8 x 6,8 mm), big drip chamber with standard dropper and without filter, big roller clamp, urological standard connector with cap. Supplied with a PVC tube (Ø 5,8 x 9,0 mm) 10 cm long.</p>	   <p>20</p> <p>STERILE EO  0425</p>	<p>Carton (29x29x49 cm) 30 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>









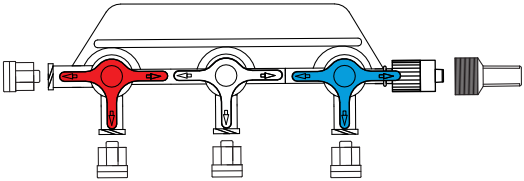



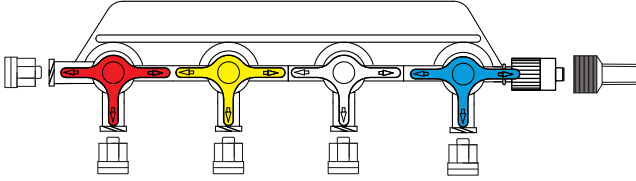



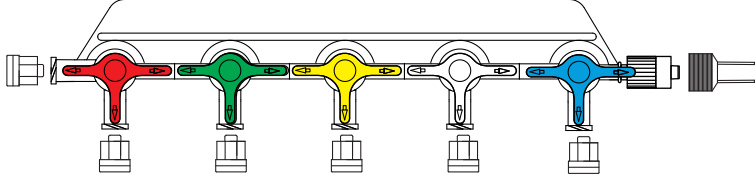


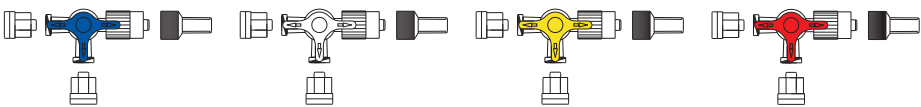
Caption:



Reference	Description	Features	Packing
<p>M1609 available variants M1610 M1611</p>	<p>Spike for drugs transfer and reconstitution by closed circuit</p>  <p>M1609 Spike for drugs transfer and reconstitution by closed circuit in white ABS, with small spike, hydrophobic 1,2 µm air filter, female luer lock connection and green snap-cap (PP). M1610 blue snap-cap with 5 µm solution filter M1611 red snap-cap with 5 µm solution filter and 0,2 µm air filter (instead of 1,2 µm) to avoid dangerous aerosol indicated for manipulation of antiblastic / chemotherapeutic drugs</p>	<p>     </p>	<p>Carton (41x50x29 cm) 400 pcs.</p> <p>Full pallet (80x120x220 cm) 24 cartons</p>
<p>MF002B available variants MF002C MF002D MF002A MF002E</p>	<p>Combi-stopper</p>  <p>MF002B Male/female Luer Lock Cap sterilized and single packed - white MF002C blue MF002D yellow MF002A red MF002E orange</p>	<p>     </p>	<p>Carton (29x29x49 cm) 800 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
<p>MF003A</p>	<p>Injection cap</p>  <p>Luer Lock cap with injection site sterilized and single packed</p>	<p>     </p>	<p>Carton (29x29x49 cm) 800 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
<p>MF004A available variants MF005B</p>	<p>Needle-free valve</p>  <p>Negative Displacement</p>  <p>Neutral Displacement</p> <p>Swabable needle-free valve with <u>negative</u> displacement (female/male luer lock) sterilized and single packed Swabable needle-free valve with <u>neutral</u> displacement (female/male luer lock) sterilized and single packed. 300 PSI pressure resistance</p>	<p>     </p>	<p>Carton (29x29x49 cm) 800 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
<p>MF006A</p>	<p>Transfer spike</p>  <p>Transfer needle with two caps sterilized and single packed</p>	<p>     </p>	<p>Carton (29x29x49 cm) 400 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
<p>MF007A</p>	<p>Check Valve</p>  <p>Male/female back check-valve with caps, sterilized and single packed</p>	<p>     </p>	<p>Carton (29x29x49 cm) 800 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>













Caption:



Reference	Description	Features	Packing
<p>MF000A</p> <p>available variants</p> <p>MF000B</p> <p>MF000C</p> <p>MF000D</p>	<p>3-way stopcocks</p>  <p>MF000A MF000B MF000C MF000D</p> <p>Lipid resistant 3-way stopcock with two female and one rotating male LL connectors with blue handle, sterilized and single packed</p> <p>white handle (instead of blue)</p> <p>yellow handle (instead of blue)</p> <p>red handle (instead of blue)</p>	<p> </p> <p>STERILE EO  0425</p>	<p>Carton (41x50x29 cm) 400 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
<p>MF000E</p> <p>available variants</p> <p>MF000F</p> <p>MF000G</p> <p>MF000H</p>	<p>3-way stopcocks with needle-free valve</p>  <p>MF000E MF000F MF000G MF000H</p> <p>Lipid resistant 3-way stopcock with one female LL connector with needle-free valve, one standard female LL connector and one rotating male LL connectors with blue handle, sterilized and single packed.</p> <p>white handle (instead of blue)</p> <p>yellow handle (instead of blue)</p> <p>red handle (instead of blue)</p>	<p> </p> <p>STERILE EO  0425</p>	<p>Carton (41x50x29 cm) 400 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
<p>MF001B</p> <p>available variants</p> <p>MF001A</p>	<p>Manifold with three 3-way stopcocks</p>  <p>Lipid-resistant manifold with three 3-way stopcock (four female luer lock connectors and one rotating male luer lock connector) with caps.</p> <p>all female luer lock connector</p>	<p> </p> <p>STERILE EO  0425</p>	<p>Carton (41x50x29 cm) 100 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
<p>MF010B</p> <p>available variants</p> <p>MF010A</p>	<p>Manifold with four 3-way stopcocks</p>  <p>Lipid-resistant manifold with four 3-way stopcock (five female luer lock connectors and one rotating male luer lock connector) with caps.</p> <p>all female luer lock connector</p>	<p> </p> <p>STERILE EO  0425</p>	<p>Carton (41x50x29 cm) 100 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
<p>MF009B</p> <p>available variants</p> <p>MF009A</p>	<p>Manifold with five 3-way stopcocks</p>  <p>Lipid-resistant manifold with five 3-way stopcock (six female luer lock connectors and one rotating male luer lock connector) with caps.</p> <p>all female luer lock connector</p>	<p> </p> <p>STERILE EO  0425</p>	<p>Carton (41x50x29 cm) 100 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>















Caption:



Reference	Description	Features	Packing
<p>TFB000AA160</p> <p>available variants</p> <p>TFB000AA180</p> <p>TFB000AA210</p>	<p>Standard blood giving set</p>  <p>PVC DEHP-free I.V. Blood giving set 160 cm long composed by non-vented spike with standard dropper, drip-chamber with 200 µm blood filter, tube Ø 3,0 x 4,1 mm, roller clamp, male luer lock connector with cap.</p> <p>180 cm long</p> <p>210 cm long</p>	    <p>20</p> <p>200 µm</p> <p>STERILE EO  0425</p>	<p>Carton (29x29x49 cm) 125 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
<p>TFB001AA150</p> <p>available variants</p> <p>TFB001AA180</p> <p>TFB001AA210</p>	<p>Blood giving set with vented spike</p>  <p>PVC DEHP-free I.V. Blood giving set 150 cm long composed by vented spike with air-inlet (with hydrophobic filter and ON/OFF cap) with standard dropper, drip-chamber with 200 µm blood filter, tube Ø 3,0 x 4,1 mm, roller clamp, male luer lock connector with cap.</p> <p>180 cm long</p> <p>210 cm long</p>	    <p>20</p> <p>200 µm</p> <p>STERILE EO  0425</p>	<p>Carton (29x29x49 cm) 125 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>





















Caption:



Reference	Description	Features	Packing
<p>Micro-bore extension lines</p>   <p>EFB000AA150 available variants EFB000AA050 EFB000AA100 EFB000AA200</p>	<p>Micro-bore extension lines 150 cm long composed by female luer lock connector with cap, PVC DEHP-free tube Ø 1,0 x 2,5 mm, male luer lock connector with cap.</p> <p>50 cm long 100 cm long 200 cm long</p>	<p>  STERILE EO  0425</p>	<p>Carton (41x50x29 cm) 300 pcs. Full pallet (80x120x220 cm) 42 cartons</p>
<p>EFB000AB150 EFB000AB050 EFB000AB100 EFB000AB200</p>	<p>with rotating male luer lock distal connector with rotating male luer lock distal connector and 50 cm long with rotating male luer lock distal connector and 100 cm long with rotating male luer lock distal connector and 200 cm long</p>	<p>rotating male LL</p>	
<p>EFC000AA150 EFC000AA050 EFC000AA100 EFC000AA200</p>	<p><u>totally PVC-free (PUR Tubing)</u> <u>totally PVC-free (PUR Tubing)</u> and 50 cm long <u>totally PVC-free (PUR Tubing)</u> and 100 cm long <u>totally PVC-free (PUR Tubing)</u> and 200 cm long</p>	<p></p>	
<p>EFC000AB150 EFC000AB050 EFC000AB100 EFC000AB200</p>	<p><u>totally PVC-free (PUR Tubing)</u> and with rotating male luer lock distal connector <u>totally PVC-free (PUR Tubing)</u>, with rotating male luer lock distal connector and 50 cm long <u>totally PVC-free (PUR Tubing)</u>, with rotating male luer lock distal connector and 100 cm long <u>totally PVC-free (PUR Tubing)</u>, with rotating male luer lock distal connector and 200 cm long</p>	<p> rotating male LL</p>	
<p>EFD000AA150 EFD000AA010 EFD000AA025 EFD000AA050 EFD000AA075 EFD000AA100 EFD000AA200</p>	<p><u>low sorbign/totally PVC-free (PE Tubing)</u> <u>low sorbign/totally PVC-free (PE Tubing)</u> and 10 cm long <u>low sorbign/totally PVC-free (PE Tubing)</u> and 25 cm long <u>low sorbign/totally PVC-free (PE Tubing)</u> and 50 cm long <u>low sorbign/totally PVC-free (PE Tubing)</u> and 75 cm long <u>low sorbign/totally PVC-free (PE Tubing)</u> and 100 cm long <u>low sorbign/totally PVC-free (PE Tubing)</u> and 200 cm long</p>	<p> low sorbign (PE)</p>	
<p>Coiled micro-bore extension lines</p>   <p>EFB009AA200 available variants EFB009AA300 EFB009AA400 EFC009AA200 EFC009AA300 EFC009AA400 EFD009AA200 EFD009AA300 EFD009AA400</p>	<p>Coiled micro-bore extension lines 200 cm long composed by female luer lock connector with cap, PVC DEHP-free tube Ø 1,0 x 2,5 mm, male luer lock connector with cap.</p> <p>300 cm long 400 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u> <u>totally PVC-free (PUR Tubing)</u> and 300 cm long <u>totally PVC-free (PUR Tubing)</u> and 400 cm long</p> <p><u>low sorbign/totally PVC-free (PE Tubing)</u> and 200 cm long <u>low sorbign/totally PVC-free (PE Tubing)</u> and 300 cm long <u>low sorbign/totally PVC-free (PE Tubing)</u> and 400 cm long</p>	<p>  STERILE EO  0425</p> <p> low sorbign (PE)</p>	<p>Carton (41x50x29 cm) 100 pcs. Full pallet (80x120x220 cm) 42 cartons</p>














Caption:



Reference	Description	Features	Packing
<p>Micro-bore extension lines for photosensitive drugs</p> <p>EFB001AA150 available variants EFB001AA050 EFB001AA100 EFB001AA200</p>	<p>Micro-bore extension lines for photosensitive drugs 150 cm long composed by female luer lock connector with cap, opaque PVC DEHP-free tube Ø 1,0 x 2,5 mm, male luer lock connector with cap.</p>   <p>1,0 mm</p>	<p>       0425 </p>	<p>Carton (41x50x29 cm) 300 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
<p>EFB001AB150 EFB001AB050 EFB001AB100 EFB001AB200</p>	<p>with rotating male luer lock distal connector</p> <p>with rotating male luer lock distal connector and 50 cm long</p> <p>with rotating male luer lock distal connector and 100 cm long</p> <p>with rotating male luer lock distal connector and 200 cm long</p>	<p>rotating male LL</p>	
<p>EFC001AA150 EFC001AA050 EFC001AA100 EFC001AA200</p>	<p><u>totally PVC-free (PUR Tubing)</u></p> <p><u>totally PVC-free (PUR Tubing)</u> and 50 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u> and 100 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u> and 200 cm long</p>	<p></p>	
<p>EFC001AB150 EFC001AB050 EFC001AB100 EFC001AB200</p>	<p><u>totally PVC-free (PUR Tubing)</u> and with rotating male luer lock distal connector</p> <p><u>totally PVC-free (PUR Tubing)</u>, with rotating male luer lock distal connector and 50 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u>, with rotating male luer lock distal connector and 100 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u>, with rotating male luer lock distal connector and 200 cm long</p>	<p> rotating male LL</p>	
<p>EFD001AA150 EFD001AA010 EFD001AA025 EFD001AA050 EFD001AA075 EFD001AA100 EFD001AA200</p>	<p><u>low sorbign/totally PVC-free (PE Tubing)</u></p> <p><u>low sorbign/totally PVC-free (PE Tubing)</u> and 10 cm long</p> <p><u>low sorbign/totally PVC-free (PE Tubing)</u> and 25 cm long</p> <p><u>low sorbign/totally PVC-free (PE Tubing)</u> and 50 cm long</p> <p><u>low sorbign/totally PVC-free (PE Tubing)</u> and 75 cm long</p> <p><u>low sorbign/totally PVC-free (PE Tubing)</u> and 100 cm long</p> <p><u>low sorbign/totally PVC-free (PE Tubing)</u> and 200 cm long</p>	<p> low sorbign (PE)</p>	
<p>Coiled micro-bore extension lines for photosensitive drugs</p> <p>EFB019AA200 available variants EFB019AA300 EFB019AA400</p> <p>EFC019AA200 EFC019AA300 EFC019AA400</p> <p>EFD019AA200 EFD019AA300 EFD019AA400</p>	<p>Coiled micro-bore extension lines for photosensitive drugs 200 cm long composed by female luer lock connector with cap, opaque PVC DEHP-free tube Ø 1,0 x 2,5 mm, male luer lock connector with cap.</p>   <p>1,0 mm</p>	<p>       0425 </p> <p> low sorbign (PE)</p>	<p>Carton (41x50x29 cm) 100 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>


















Caption:



Reference	Description	Features	Packing
	<p>Micro-bore extension lines with needle-free access</p>   <p>1,0 mm</p>	 	<p>Carton (41x50x29 cm) 300 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
EFB000OA150 available variants EFB000OA050 EFB000OA100 EFB000OA200	<p>Micro-bore extension lines 150 cm long composed by female luer lock connector with needle-free valve, PVC DEHP-free tube Ø 1,0 x 2,5 mm, male luer lock connector with cap.</p> <p>50 cm long 100 cm long 200 cm long</p>		
EFB000OB150 EFB000OB050 EFB000OB100 EFB000OB200	<p>with rotating male luer lock distal connector</p> <p>with rotating male luer lock distal connector and 50 cm long with rotating male luer lock distal connector and 100 cm long with rotating male luer lock distal connector and 200 cm long</p>	rotating male LL	
EFC000OA150 EFC000OA050 EFC000OA100 EFC000OA200	<p><u>totally PVC-free (PUR Tubing)</u></p> <p><u>totally PVC-free (PUR Tubing)</u> and 50 cm long <u>totally PVC-free (PUR Tubing)</u> and 100 cm long <u>totally PVC-free (PUR Tubing)</u> and 200 cm long</p>		
EFC000OB150 EFC000OB050 EFC000OB100 EFC000OB200	<p><u>totally PVC-free (PUR Tubing)</u> and with rotating male luer lock distal connector</p> <p><u>totally PVC-free (PUR Tubing)</u>, with rotating male luer lock distal connector and 50 cm long <u>totally PVC-free (PUR Tubing)</u>, with rotating male luer lock distal connector and 100 cm long <u>totally PVC-free (PUR Tubing)</u>, with rotating male luer lock distal connector and 200 cm long</p>	 rotating male LL	
EFD000OA150 EFD000OA010 EFD000OA025 EFD000OA050 EFD000OA075 EFD000OA100 EFD000OA200	<p><u>low sorbign/totally PVC-free (PE Tubing)</u></p> <p><u>low sorbign/totally PVC-free (PE Tubing)</u> and 10 cm long <u>low sorbign/totally PVC-free (PE Tubing)</u> and 25 cm long <u>low sorbign/totally PVC-free (PE Tubing)</u> and 50 cm long <u>low sorbign/totally PVC-free (PE Tubing)</u> and 75 cm long <u>low sorbign/totally PVC-free (PE Tubing)</u> and 100 cm long <u>low sorbign/totally PVC-free (PE Tubing)</u> and 200 cm long</p>	 low sorbign (PE)	
	<p>Coiled micro-bore extension lines with needle-free access</p>   <p>1,0 mm</p>	 	<p>Carton (41x50x29 cm) 100 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
EFB009OA200 available variants EFB009OA300 EFB009OA400	<p>Coiled micro-bore extension lines 200 cm long composed by female luer lock connector with needle-free valve, PVC DEHP-free tube Ø 1,0 x 2,5 mm, male luer lock connector with cap.</p> <p>300 cm long 400 cm long</p>		
EFC009OA200 EFC009OA300 EFC009OA400	<p><u>totally PVC-free (PUR Tubing)</u></p> <p><u>totally PVC-free (PUR Tubing)</u> and 300 cm long <u>totally PVC-free (PUR Tubing)</u> and 400 cm long</p>		
EFD009OA200 EFD009OA300 EFD009OA400	<p><u>low sorbign/totally PVC-free (PE Tubing)</u> and 200 cm long <u>low sorbign/totally PVC-free (PE Tubing)</u> and 300 cm long <u>low sorbign/totally PVC-free (PE Tubing)</u> and 400 cm long</p>	 low sorbign (PE)	

Caption:














Reference	Description	Features	Packing
<p>Micro-bore extension lines with needle-free access for photosensitive drugs</p>   <p>EFB001OA150 available variants EFB001OA050 EFB001OA100 EFB001OA200</p>	<p>Micro-bore extension lines 150 cm long composed by female luer lock connector with needle-free valve, opaque PVC DEHP-free tube Ø 1,0 x 2,5 mm, male luer lock connector with cap.</p> <p>50 cm long 100 cm long 200 cm long</p>	<p>  </p> <p>STERILE EO  0425</p>	<p>Carton (41x50x29 cm) 300 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
<p>EFB001OB150 EFB001OB050 EFB001OB100 EFB001OB200</p>	<p>with rotating male luer lock distal connector</p> <p>with rotating male luer lock distal connector and 50 cm long</p> <p>with rotating male luer lock distal connector and 100 cm long</p> <p>with rotating male luer lock distal connector and 200 cm long</p>	<p>rotating male LL</p>	
<p>EFC001OA150 EFC001OA050 EFC001OA100 EFC001OA200</p>	<p><u>totally PVC-free (PUR Tubing)</u></p> <p><u>totally PVC-free (PUR Tubing)</u> and 50 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u> and 100 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u> and 200 cm long</p>	<p></p>	
<p>EFC001OB150 EFC001OB050 EFC001OB100 EFC001OB200</p>	<p><u>totally PVC-free (PUR Tubing)</u> and with rotating male luer lock distal connector</p> <p><u>totally PVC-free (PUR Tubing)</u>, with rotating male luer lock distal connector and 50 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u>, with rotating male luer lock distal connector and 100 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u>, with rotating male luer lock distal connector and 200 cm long</p>	<p></p> <p>rotating male LL</p>	
<p>EFD001OA150 EFD001OA010 EFD001OA025 EFD001OA050 EFD001OA075 EFD001OA100 EFD001OA200</p>	<p><u>low sorbign/totally PVC-free (PE Tubing)</u></p> <p><u>low sorbign/totally PVC-free (PE Tubing)</u> and 10 cm long</p> <p><u>low sorbign/totally PVC-free (PE Tubing)</u> and 25 cm long</p> <p><u>low sorbign/totally PVC-free (PE Tubing)</u> and 50 cm long</p> <p><u>low sorbign/totally PVC-free (PE Tubing)</u> and 75 cm long</p> <p><u>low sorbign/totally PVC-free (PE Tubing)</u> and 100 cm long</p> <p><u>low sorbign/totally PVC-free (PE Tubing)</u> and 200 cm long</p>	<p></p> <p>low sorbign (PE)</p>	
<p>Coiled micro-bore extension lines with needle-free access for photosensitive drugs</p>   <p>EFB019OA200 available variants EFB019OA300 EFB019OA400</p>	<p>Coiled micro-bore extension lines for photosensitive drugs 200 cm long composed by female luer lock connector with needle-free valve, opaque PVC DEHP-free tube Ø 1,0 x 2,5 mm, male luer lock connector with cap.</p> <p>300 cm long 400 cm long</p>	<p>  </p> <p>STERILE EO  0425</p>	<p>Carton (41x50x29 cm) 100 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
<p>EFC019OA200 EFC019OA300 EFC019OA400</p>	<p><u>totally PVC-free (PUR Tubing)</u></p> <p><u>totally PVC-free (PUR Tubing)</u> and 300 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u> and 400 cm long</p>	<p></p>	
<p>EFD019OA200 EFD019OA300 EFD019OA400</p>	<p><u>low sorbign/totally PVC-free (PE Tubing)</u> and 200 cm long</p> <p><u>low sorbign/totally PVC-free (PE Tubing)</u> and 300 cm long</p> <p><u>low sorbign/totally PVC-free (PE Tubing)</u> and 400 cm long</p>	<p></p> <p>low sorbign (PE)</p>	

Caption:











PRO-LONG TUBE - Small bore extension lines

Reference	Description	Features	Packing
	<p>Small bore extension lines</p>   <p>1,5 mm</p>	 	<p>Carton (41x50x29 cm) 300 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
<p>EFB002AA150 available variants</p> <p>EFB002AA030</p> <p>EFB002AA060</p> <p>EFB002AA090</p> <p>EFB002AA120</p> <p>EFB002AA200</p>	<p>Small bore extension lines 150 cm long composed by female luer lock connector with cap, PVC DEHP-free tube Ø 1,5 x 3,0 mm, male luer lock connector with cap.</p> <p>30 cm long</p> <p>60 cm long</p> <p>90 cm long</p> <p>120 cm long</p> <p>200 cm long</p>		
<p>EFB002AB150</p> <p>EFB002AB030</p> <p>EFB002AB060</p> <p>EFB002AB090</p> <p>EFB002AB120</p> <p>EFB002AB200</p>	<p>with rotating male luer lock distal connector</p> <p>with rotating male luer lock distal connector and 30 cm long</p> <p>with rotating male luer lock distal connector and 60 cm long</p> <p>with rotating male luer lock distal connector and 90 cm long</p> <p>with rotating male luer lock distal connector and 120 cm long</p> <p>with rotating male luer lock distal connector and 200 cm long</p>	<p>rotating male LL</p>	
<p>EFB002BB150</p> <p>EFB002BB030</p> <p>EFB002BB060</p> <p>EFB002BB090</p> <p>EFB002BB120</p> <p>EFB002BB200</p>	<p>with <u>two male</u> luer lock distal connectors</p> <p>with <u>two male</u> luer lock distal connectors and 30 cm long</p> <p>with <u>two male</u> luer lock distal connectors and 60 cm long</p> <p>with <u>two male</u> luer lock distal connectors and 90 cm long</p> <p>with <u>two male</u> luer lock distal connectors and 120 cm long</p> <p>with <u>two male</u> luer lock distal connectors and 200 cm long</p>	<p>double male LL</p>	
<p>EFC002AA150</p> <p>EFC002AA030</p> <p>EFC002AA060</p> <p>EFC002AA090</p> <p>EFC002AA120</p> <p>EFC002AA200</p>	<p><u>totally PVC-free</u> (PUR Tubing)</p> <p><u>totally PVC-free</u> (PUR Tubing) and 30 cm long</p> <p><u>totally PVC-free</u> (PUR Tubing) and 60 cm long</p> <p><u>totally PVC-free</u> (PUR Tubing) and 90 cm long</p> <p><u>totally PVC-free</u> (PUR Tubing) and 120 cm long</p> <p><u>totally PVC-free</u> (PUR Tubing) and 200 cm long</p>		
<p>EFC002AB150</p> <p>EFC002AB030</p> <p>EFC002AB060</p> <p>EFC002AB090</p> <p>EFC002AB120</p> <p>EFC002AB200</p>	<p><u>totally PVC-free</u> (PUR Tubing) and with rotating male luer lock distal connector</p> <p><u>totally PVC-free</u> (PUR Tubing), with rotating male luer lock distal connector and 30 cm long</p> <p><u>totally PVC-free</u> (PUR Tubing), with rotating male luer lock distal connector and 60 cm long</p> <p><u>totally PVC-free</u> (PUR Tubing), with rotating male luer lock distal connector and 90 cm long</p> <p><u>totally PVC-free</u> (PUR Tubing), with rotating male luer lock distal connector and 120 cm long</p> <p><u>totally PVC-free</u> (PUR Tubing), with rotating male luer lock distal connector and 200 cm long</p>	 <p>rotating male LL</p>	
	<p>Coiled small bore extension lines</p>   <p>1,5 mm</p>	 	<p>Carton (41x50x29 cm) 100 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
<p>EFB011AA200 available variants</p> <p>EFB011AA300</p> <p>EFB011AA400</p>	<p>Coiled small bore extension lines 200 cm long composed by female luer lock connector with cap, PVC DEHP-free tube Ø 1,5 x 3,0 mm, Male luer lock connector with cap.</p> <p>300 cm long</p> <p>400 cm long</p>		
<p>EFC011AA200</p> <p>EFC011AA300</p> <p>EFC011AA400</p>	<p><u>totally PVC-free</u> (PUR Tubing)</p> <p><u>totally PVC-free</u> (PUR Tubing) and 300 cm long</p> <p><u>totally PVC-free</u> (PUR Tubing) and 400 cm long</p>		













Caption:



Reference	Description	Features	Packing
<p>EFB003AA150 available variants EFB003AA030 EFB003AA060 EFB003AA090 EFB003AA120 EFB003AA200</p>	<p>Small bore extension lines for photosensitive drugs</p>   <p>Small bore extension lines for photosensitive drugs 150 cm long composed by female luer lock connector with cap, PVC DEHP-free tube Ø 1,5 x 3,0 mm, male luer lock connector with cap.</p>		<p>Carton (41x50x29 cm) 300 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
<p>EFB003AB150 EFB003AB030 EFB003AB060 EFB003AB090 EFB003AB120 EFB003AB200</p>	<p>with rotating male luer lock distal connector</p> <p>with rotating male luer lock distal connector and 30 cm long</p> <p>with rotating male luer lock distal connector and 60 cm long</p> <p>with rotating male luer lock distal connector and 90 cm long</p> <p>with rotating male luer lock distal connector and 120 cm long</p> <p>with rotating male luer lock distal connector and 200 cm long</p>	<p>rotating male LL</p>	
<p>EFB003BB150 EFB003BB030 EFB003BB060 EFB003BB090 EFB003BB120 EFB002BB200</p>	<p>with <u>two male</u> luer lock distal connectors</p> <p>with <u>two male</u> luer lock distal connectors and 30 cm long</p> <p>with <u>two male</u> luer lock distal connectors and 60 cm long</p> <p>with <u>two male</u> luer lock distal connectors and 90 cm long</p> <p>with <u>two male</u> luer lock distal connectors and 120 cm long</p> <p>with <u>two male</u> luer lock distal connectors and 200 cm long</p>	<p>double male LL</p>	
<p>EFC003AA150 EFC003AA030 EFC003AA060 EFC003AA090 EFC003AA120 EFC003AA200</p>	<p><u>totally PVC-free</u> (PUR Tubing)</p> <p><u>totally PVC-free</u> (PUR Tubing) and 30 cm long</p> <p><u>totally PVC-free</u> (PUR Tubing) and 60 cm long</p> <p><u>totally PVC-free</u> (PUR Tubing) and 90 cm long</p> <p><u>totally PVC-free</u> (PUR Tubing) and 120 cm long</p> <p><u>totally PVC-free</u> (PUR Tubing) and 200 cm long</p>		
<p>EFC003AB150 EFC003AB030 EFC003AB060 EFC003AB090 EFC003AB120 EFC003AB200</p>	<p><u>totally PVC-free</u> (PUR Tubing) and with rotating male luer lock distal connector</p> <p><u>totally PVC-free</u> (PUR Tubing), with rotating male luer lock distal connector and 30 cm long</p> <p><u>totally PVC-free</u> (PUR Tubing), with rotating male luer lock distal connector and 60 cm long</p> <p><u>totally PVC-free</u> (PUR Tubing), with rotating male luer lock distal connector and 90 cm long</p> <p><u>totally PVC-free</u> (PUR Tubing), with rotating male luer lock distal connector and 120 cm long</p> <p><u>totally PVC-free</u> (PUR Tubing), with rotating male luer lock distal connector and 200 cm long</p>	 rotating male LL	
<p>EFB020AA200 available variants EFB020AA300 EFB020AA400 EFC020AA200 EFC020AA300 EFC020AA400</p>	<p>Coiled small bore extension lines for photosensitive drugs</p>   <p>Coiled small bore extension lines for photosensitive drugs 200 cm long composed by female luer lock connector with cap, PVC DEHP-free tube Ø 1,5 x 3,0 mm, Male luer lock connector with cap.</p>		<p>Carton (41x50x29 cm) 100 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
















Caption:



Reference	Description	Features	Packing
<p>Small bore extension lines with needle-free access</p> <p>EFB002OA150 available variants EFB002OA030 EFB002OA060 EFB002OA090 EFB002OA120 EFB002OA200</p>	<p>Small bore extension lines with needle-free access</p>   <p>1,5 mm</p> <p>Small bore extension lines 150 cm long composed by female luer lock connector with needle-free valve, PVC DEHP-free tube Ø 1,5 x 3,0 mm, male luer lock connector with cap.</p>	<p> </p> <p>STERILE EO  0425</p>	<p>Carton (41x50x29 cm) 300 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
<p>EFB002OB150 EFB002OB030 EFB002OB060 EFB002OB090 EFB002OB120 EFB002OB200</p>	<p>with rotating male luer lock distal connector</p> <p>with rotating male luer lock distal connector and 30 cm long</p> <p>with rotating male luer lock distal connector and 60 cm long</p> <p>with rotating male luer lock distal connector and 90 cm long</p> <p>with rotating male luer lock distal connector and 120 cm long</p> <p>with rotating male luer lock distal connector and 200 cm long</p>	<p>rotating male LL</p>	
<p>EFC002OA150 EFC002OA030 EFC002OA060 EFC002OA090 EFC002OA120 EFC002OA200</p>	<p><u>totally PVC-free (PUR Tubing)</u></p> <p><u>totally PVC-free (PUR Tubing)</u> and 30 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u> and 60 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u> and 90 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u> and 120 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u> and 200 cm long</p>	<p></p>	
<p>EFC002OB150 EFC002OB030 EFC002OB060 EFC002OB090 EFC002OB120 EFC002OB200</p>	<p><u>totally PVC-free (PUR Tubing)</u> and with rotating male luer lock distal connector</p> <p><u>totally PVC-free (PUR Tubing)</u>, with rotating male luer lock distal connector and 30 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u>, with rotating male luer lock distal connector and 60 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u>, with rotating male luer lock distal connector and 90 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u>, with rotating male luer lock distal connector and 120 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u>, with rotating male luer lock distal connector and 200 cm long</p>	<p></p> <p>rotating male LL</p>	
<p>Coiled small bore extension lines with needle-free access</p> <p>EFB011OA200 available variants EFB011OA300 EFB011OA400</p> <p>EFC011OA200 EFC011OA300 EFC011OA400</p>	<p>Coiled small bore extension lines with needle-free access</p>   <p>1,5 mm</p> <p>Coiled small bore extension lines 200 cm long composed by female luer lock connector with needle-free valve, PVC DEHP-free tube Ø 1,5 x 3,0 mm, Male luer lock connector with cap.</p>	<p> </p> <p>STERILE EO  0425</p>	<p>Carton (41x50x29 cm) 100 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>

Caption:












Reference	Description	Features	Packing
<p>EFB003OA150 available variants EFB003OA030 EFB003OA060 EFB003OA090 EFB003OA120 EFB003OA200</p>	<p>Small bore extension lines with needle-free access for photosensitive drugs</p>   <p>Small bore extension lines for photosensitive drugs 150 cm long composed by female luer lock connector with with needle-free valve, PVC DEHP-free tube Ø 1,5 x 3,0 mm, male luer lock connector with cap.</p>	<p>  </p> <p>STERILE EO  0425</p>	<p>Carton (41x50x29 cm) 300 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
<p>EFB003OB150 EFB003OB030 EFB003OB060 EFB003OB090 EFB003OB120 EFB003OB200</p>	<p>with rotating male luer lock distal connector</p> <p>with rotating male luer lock distal connector and 30 cm long</p> <p>with rotating male luer lock distal connector and 60 cm long</p> <p>with rotating male luer lock distal connector and 90 cm long</p> <p>with rotating male luer lock distal connector and 120 cm long</p> <p>with rotating male luer lock distal connector and 200 cm long</p>	<p>rotating male LL</p>	
<p>EFC003OA150 EFC003OA030 EFC003OA060 EFC003OA090 EFC003OA120 EFC003OA200</p>	<p><u>totally PVC-free</u> (PUR Tubing)</p> <p><u>totally PVC-free</u> (PUR Tubing) and 30 cm long</p> <p><u>totally PVC-free</u> (PUR Tubing) and 60 cm long</p> <p><u>totally PVC-free</u> (PUR Tubing) and 90 cm long</p> <p><u>totally PVC-free</u> (PUR Tubing) and 120 cm long</p> <p><u>totally PVC-free</u> (PUR Tubing) and 200 cm long</p>	<p></p>	
<p>EFC003OB150 EFC003OB030 EFC003OB060 EFC003OB090 EFC003OB120 EFC003OB200</p>	<p><u>totally PVC-free</u> (PUR Tubing) and with rotating male luer lock distal connector</p> <p><u>totally PVC-free</u> (PUR Tubing), with rotating male luer lock distal connector and 30 cm long</p> <p><u>totally PVC-free</u> (PUR Tubing), with rotating male luer lock distal connector and 60 cm long</p> <p><u>totally PVC-free</u> (PUR Tubing), with rotating male luer lock distal connector and 90 cm long</p> <p><u>totally PVC-free</u> (PUR Tubing), with rotating male luer lock distal connector and 120 cm long</p> <p><u>totally PVC-free</u> (PUR Tubing), with rotating male luer lock distal connector and 200 cm long</p>	<p></p> <p>rotating male LL</p>	
<p>EFB020OA200 available variants EFB020OA300 EFB020OA400 EFC020OA200 EFC020OA300 EFC020OA400</p>	<p>Coiled small bore extension lines with needle-free access for photosensitive drugs</p>   <p>Coiled small bore extension lines for photosensitive drugs 200 cm long composed by female luer lock connector with with needle-free valve, PVC DEHP-free tube Ø 1,5 x 3,0 mm, Male luer lock connector with cap.</p>	<p>  </p> <p>STERILE EO  0425</p> <p></p>	<p>Carton (41x50x29 cm) 100 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>

Caption:


















PRO-LONG TUBE - Small bore extension lines with 3-way stopcock

Reference	Description	Features	Packing
	<p>Small bore extension lines with 3-way stopcocks</p> 	 	<p>Carton (41x50x29 cm) 200 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
<p>EFB002CA010 available variants</p> <p>EFB002CA030</p> <p>EFB002CA060</p> <p>EFB002CA090</p> <p>EFB002CA120</p> <p>EFB002CA150</p>	<p>Small bore extension lines 10 cm long composed by lipid resistant 3-way stopcock with caps, PVC DEHP-free tube Ø 1,5 x 3,0 mm, male luer lock connector with cap.</p> <p>30 cm long</p> <p>60 cm long</p> <p>90 cm long</p> <p>120 cm long</p> <p>150 cm long</p>		
<p>EFB002CB010</p> <p>EFB002CB030</p> <p>EFB002CB060</p> <p>EFB002CB090</p> <p>EFB002CB120</p> <p>EFB002CB150</p>	<p>with rotating male luer lock distal connector</p> <p>with rotating male luer lock distal connector and 30 cm long</p> <p>with rotating male luer lock distal connector and 60 cm long</p> <p>with rotating male luer lock distal connector and 90 cm long</p> <p>with rotating male luer lock distal connector and 120 cm long</p> <p>with rotating male luer lock distal connector and 150 cm long</p>	<p>rotating male LL</p>	
<p>EFC002CA150</p> <p>EFC002CA030</p> <p>EFC002CA060</p> <p>EFC002CA090</p> <p>EFC002CA120</p> <p>EFC002CA200</p>	<p><u>totally PVC-free (PUR Tubing)</u></p> <p><u>totally PVC-free (PUR Tubing)</u> and 30 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u> and 60 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u> and 90 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u> and 120 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u> and 200 cm long</p>		
<p>EFC002CB150</p> <p>EFC002CB030</p> <p>EFC002CB060</p> <p>EFC002CB090</p> <p>EFC002CB120</p> <p>EFC002CB200</p>	<p><u>totally PVC-free (PUR Tubing)</u> and with rotating male luer lock distal connector</p> <p><u>totally PVC-free (PUR Tubing)</u>, with rotating male luer lock distal connector and 30 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u>, with rotating male luer lock distal connector and 60 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u>, with rotating male luer lock distal connector and 90 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u>, with rotating male luer lock distal connector and 120 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u>, with rotating male luer lock distal connector and 200 cm long</p>	 <p>rotating male LL</p>	
	<p>Small bore extension lines with 3-way stopcocks and needle-free access</p> 	 	<p>Carton (41x50x29 cm) 200 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
<p>EFB002QA010 available variants</p> <p>EFB002QA030</p> <p>EFB002QA060</p> <p>EFB002QA090</p> <p>EFB002QA120</p> <p>EFB002QA150</p>	<p>Small bore extension lines 10 cm long composed by lipid resistant 3-way stopcock with needle-free valves, PVC DEHP-free tube Ø 1,5 x 3,0 mm, male luer lock connector with cap.</p> <p>30 cm long</p> <p>60 cm long</p> <p>90 cm long</p> <p>120 cm long</p> <p>150 cm long</p>		
<p>EFC002OB150</p> <p>EFC002OB030</p> <p>EFC002OB060</p> <p>EFC002OB090</p> <p>EFC002OB120</p> <p>EFC002OB200</p>	<p><u>totally PVC-free (PUR Tubing)</u> and with rotating male luer lock distal connector</p> <p><u>totally PVC-free (PUR Tubing)</u>, with rotating male luer lock distal connector and 30 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u>, with rotating male luer lock distal connector and 60 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u>, with rotating male luer lock distal connector and 90 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u>, with rotating male luer lock distal connector and 120 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u>, with rotating male luer lock distal connector and 200 cm long</p>	 <p>rotating male LL</p>	

Caption:
















Reference	Description	Features	Packing
<p>EFB003CA010 available variants EFB003CA030 EFB003CA060 EFB003CA090 EFB003CA120 EFB003CA150</p>	<p>Small bore extension lines with 3-way stopcocks</p>   <p>Small bore extension lines 10 cm long composed by lipid resistant 3-way stopcock with caps, PVC DEHP-free tube Ø 1,5 x 3,0 mm, male luer lock connector with cap.</p>	<p>  </p> <p>STERILE EO  0425</p>	<p>Carton (41x50x29 cm) 200 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
<p>EFB003CB010 EFB003CB030 EFB003CB060 EFB003CB090 EFB003CB120 EFB003CB150</p>	<p>with rotating male luer lock distal connector</p> <p>with rotating male luer lock distal connector and 30 cm long</p> <p>with rotating male luer lock distal connector and 60 cm long</p> <p>with rotating male luer lock distal connector and 90 cm long</p> <p>with rotating male luer lock distal connector and 120 cm long</p> <p>with rotating male luer lock distal connector and 150 cm long</p>	<p>rotating male LL</p>	
<p>EFC003CA150 EFC003CA030 EFC003CA060 EFC003CA090 EFC003CA120 EFC003CA200</p>	<p><u>totally PVC-free (PUR Tubing)</u></p> <p><u>totally PVC-free (PUR Tubing)</u> and 30 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u> and 60 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u> and 90 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u> and 120 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u> and 200 cm long</p>	<p></p>	
<p>EFC003CB150 EFC003CB030 EFC003CB060 EFC003CB090 EFC003CB120 EFC003CB200</p>	<p><u>totally PVC-free (PUR Tubing)</u> and with rotating male luer lock distal connector</p> <p><u>totally PVC-free (PUR Tubing)</u>, with rotating male luer lock distal connector and 30 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u>, with rotating male luer lock distal connector and 60 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u>, with rotating male luer lock distal connector and 90 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u>, with rotating male luer lock distal connector and 120 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u>, with rotating male luer lock distal connector and 200 cm long</p>	<p></p> <p>rotating male LL</p>	
<p>EFB003QA010 available variants EFB003QA030 EFB003QA060 EFB003QA090 EFB003QA120 EFB003QA150</p> <p>EFC003QB150 EFC003QB030 EFC003QB060 EFC003QB090 EFC003QB120 EFC003QB200</p>	<p>Small bore extension lines with 3-way stopcocks and needle-free access</p>   <p>Small bore extension lines 10 cm long composed by lipid resistant 3-way stopcock with needle-free valves, PVC DEHP-free tube Ø 1,5 x 3,0 mm, male luer lock connector with cap.</p> <p><u>totally PVC-free (PUR Tubing)</u> and with rotating male luer lock distal connector</p> <p><u>totally PVC-free (PUR Tubing)</u>, with rotating male luer lock distal connector and 30 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u>, with rotating male luer lock distal connector and 60 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u>, with rotating male luer lock distal connector and 90 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u>, with rotating male luer lock distal connector and 120 cm long</p> <p><u>totally PVC-free (PUR Tubing)</u>, with rotating male luer lock distal connector and 200 cm long</p>	<p>  </p> <p>STERILE EO  0425</p> <p></p> <p>rotating male LL</p>	<p>Carton (41x50x29 cm) 200 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>

Caption:













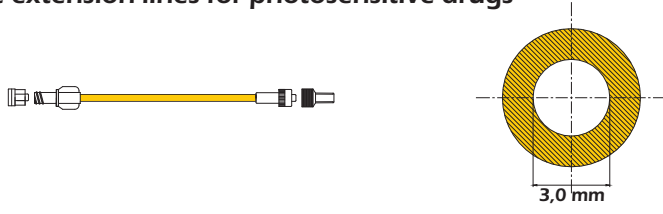






PRO-LONG TUBE - Standard bore extension lines

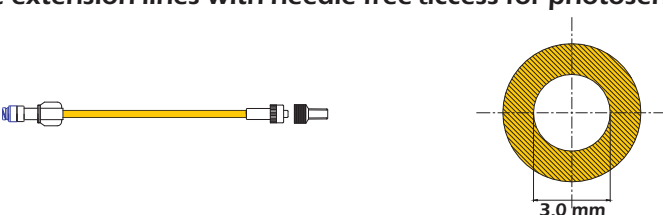Reference	Description	Features	Packing
<p>Standard bore extension lines</p>   <p>EFB004AA150 Stanadrd bore extension lines 150 cm long composed by female luer lock connector with cap, PVC DEHP-free tube Ø 3,0 x 4,1 mm, male luer lock connector with cap. available variants</p> <p>EFB004AA030 30 cm long</p> <p>EFB004AA060 60 cm long</p> <p>EFB004AA090 90 cm long</p> <p>EFB004AA120 120 cm long</p> <p>EFB004AA200 200 cm long</p>		  <p>STERILE EO</p>  <p>0425</p>	<p>Carton (41x50x29 cm) 300 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
<p>EFB004AB150 with rotating male luer lock distal connector</p> <p>EFB004AB030 with rotating male luer lock distal connector and 30 cm long</p> <p>EFB004AB060 with rotating male luer lock distal connector and 60 cm long</p> <p>EFB004AB090 with rotating male luer lock distal connector and 90 cm long</p> <p>EFB004AB120 with rotating male luer lock distal connector and 120 cm long</p> <p>EFB004AB200 with rotating male luer lock distal connector and 200 cm long</p>		<p>rotating male LL</p>	
<p>EFC004AA150 <u>totally PVC-free</u> (PUR Tubing)</p> <p>EFC004AA030 <u>totally PVC-free</u> (PUR Tubing) and 30 cm long</p> <p>EFC004AA060 <u>totally PVC-free</u> (PUR Tubing) and 60 cm long</p> <p>EFC004AA090 <u>totally PVC-free</u> (PUR Tubing) and 90 cm long</p> <p>EFC004AA120 <u>totally PVC-free</u> (PUR Tubing) and 120 cm long</p> <p>EFC004AA200 <u>totally PVC-free</u> (PUR Tubing) and 200 cm long</p>			
<p>EFC004AB150 <u>totally PVC-free</u> (PUR Tubing) and with rotating male luer lock distal connector</p> <p>EFC004AB030 <u>totally PVC-free</u> (PUR Tubing), with rotating male luer lock distal connector and 30 cm long</p> <p>EFC004AB060 <u>totally PVC-free</u> (PUR Tubing), with rotating male luer lock distal connector and 60 cm long</p> <p>EFC004AB090 <u>totally PVC-free</u> (PUR Tubing), with rotating male luer lock distal connector and 90 cm long</p> <p>EFC004AB120 <u>totally PVC-free</u> (PUR Tubing), with rotating male luer lock distal connector and 120 cm long</p> <p>EFC004AB200 <u>totally PVC-free</u> (PUR Tubing), with rotating male luer lock distal connector and 200 cm long</p>		 <p>rotating male LL</p>	
<p>Standard bore extension lines with needle-free access</p>   <p>EFB004OA150 Stanadrd bore extension lines 150 cm long composed by female luer lock connector with cap, PVC DEHP-free tube Ø 3,0 x 4,1 mm, male luer lock connector with cap. available variants</p> <p>EFB004OA030 30 cm long</p> <p>EFB004OA060 60 cm long</p> <p>EFB004OA090 90 cm long</p> <p>EFB004OA120 120 cm long</p> <p>EFB004OA200 200 cm long</p>		  <p>STERILE EO</p>  <p>0425</p>	<p>Carton (41x50x29 cm) 300 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
<p>EFC004OB150 <u>totally PVC-free</u> (PUR Tubing) and with rotating male luer lock distal connector</p> <p>EFC004OB030 <u>totally PVC-free</u> (PUR Tubing), with rotating male luer lock distal connector and 30 cm long</p> <p>EFC004OB060 <u>totally PVC-free</u> (PUR Tubing), with rotating male luer lock distal connector and 60 cm long</p> <p>EFC004OB090 <u>totally PVC-free</u> (PUR Tubing), with rotating male luer lock distal connector and 90 cm long</p> <p>EFC004OB120 <u>totally PVC-free</u> (PUR Tubing), with rotating male luer lock distal connector and 120 cm long</p> <p>EFC004OB200 <u>totally PVC-free</u> (PUR Tubing), with rotating male luer lock distal connector and 200 cm long</p>		 <p>rotating male LL</p>	

Caption:












Reference	Description	Features	Packing
<p>EFB005AA150 available variants EFB005AA030 EFB005AA060 EFB005AA090 EFB005AA120 EFB005AA200</p>	<p>Standard bore extension lines for photosensitive drugs</p>  <p>Standard bore extension lines for photosensitive drugs 150 cm long composed by female luer lock connector with cap, PVC DEHP-free tube Ø 3,0 x 4,1 mm, male luer lock connector with cap.</p>	<p>      0425</p>	<p>Carton (41x50x29 cm) 300 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
<p>EFB005AB150 EFB005AB030 EFB005AB060 EFB005AB090 EFB005AB120 EFB005AB200</p>	<p>with rotating male luer lock distal connector</p> <p>with rotating male luer lock distal connector and 30 cm long</p> <p>with rotating male luer lock distal connector and 60 cm long</p> <p>with rotating male luer lock distal connector and 90 cm long</p> <p>with rotating male luer lock distal connector and 120 cm long</p> <p>with rotating male luer lock distal connector and 200 cm long</p>	<p>rotating male LL</p>	
<p>EFC005AA150 EFC005AA030 EFC005AA060 EFC005AA090 EFC005AA120 EFC005AA200</p>	<p><u>totally PVC-free</u> (PUR Tubing)</p> <p><u>totally PVC-free</u> (PUR Tubing) and 30 cm long</p> <p><u>totally PVC-free</u> (PUR Tubing) and 60 cm long</p> <p><u>totally PVC-free</u> (PUR Tubing) and 90 cm long</p> <p><u>totally PVC-free</u> (PUR Tubing) and 120 cm long</p> <p><u>totally PVC-free</u> (PUR Tubing) and 200 cm long</p>	<p></p>	
<p>EFC005AB150 EFC005AB030 EFC005AB060 EFC005AB090 EFC005AB120 EFC005AB200</p>	<p><u>totally PVC-free</u> (PUR Tubing) and with rotating male luer lock distal connector</p> <p><u>totally PVC-free</u> (PUR Tubing), with rotating male luer lock distal connector and 30 cm long</p> <p><u>totally PVC-free</u> (PUR Tubing), with rotating male luer lock distal connector and 60 cm long</p> <p><u>totally PVC-free</u> (PUR Tubing), with rotating male luer lock distal connector and 90 cm long</p> <p><u>totally PVC-free</u> (PUR Tubing), with rotating male luer lock distal connector and 120 cm long</p> <p><u>totally PVC-free</u> (PUR Tubing), with rotating male luer lock distal connector and 200 cm long</p>	<p> rotating male LL</p>	
<p>EFB005OA150 available variants EFB005OA030 EFB005OA060 EFB005OA090 EFB005OA120 EFB005OA200</p> <p>EFC005OB150 EFC005OB030 EFC005OB060 EFC005OB090 EFC005OB120 EFC005OB200</p>	<p>Standard bore extension lines with needle-free access for photosensitive</p>  <p>Standard bore extension lines for photosensitive drugs 150 cm long composed by female luer lock with needle-free valve, PVC DEHP-free tube Ø 3,0 x 4,1 mm, male luer lock connector with cap.</p>	<p>      0425</p> <p> rotating male LL</p>	<p>Carton (41x50x29 cm) 300 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>

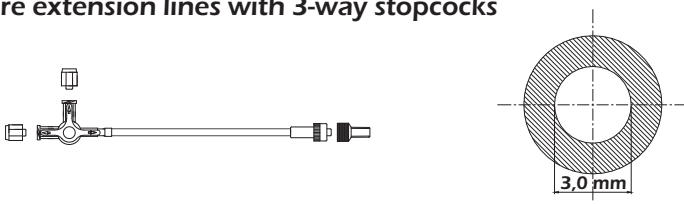Caption:




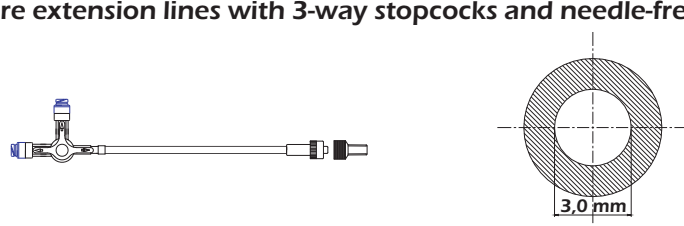








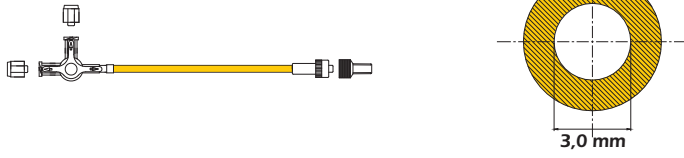


PRO-LONG TUBE - Standard bore extension lines with 3-way stopcock

Reference	Description	Features	Packing
	<p>Standard bore extension lines with 3-way stopcocks</p> 	 	<p>Carton (41x50x29 cm) 200 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
<p>EFB004CA010 available variants</p> <p>EFB004CA030</p> <p>EFB004CA060</p> <p>EFB004CA090</p> <p>EFB004CA120</p> <p>EFB004CA150</p>	<p>Standard bore extension lines 10 cm long composed by lipid resistant 3-way stopcock with caps, PVC DEHP-free tube Ø 3,0 x 4,1 mm, male luer lock connector with cap.</p> <p>30 cm long</p> <p>60 cm long</p> <p>90 cm long</p> <p>120 cm long</p> <p>150 cm long</p>		
<p>EFB004CB010</p> <p>EFB004CB030</p> <p>EFB004CB060</p> <p>EFB004CB090</p> <p>EFB004CB120</p> <p>EFB004CB150</p>	<p>with rotating male luer lock distal connector</p> <p>with rotating male luer lock distal connector and 30 cm long</p> <p>with rotating male luer lock distal connector and 60 cm long</p> <p>with rotating male luer lock distal connector and 90 cm long</p> <p>with rotating male luer lock distal connector and 120 cm long</p> <p>with rotating male luer lock distal connector and 150 cm long</p>	<p>rotating male LL</p>	
<p>EFC004CA150</p> <p>EFC004CA030</p> <p>EFC004CA060</p> <p>EFC004CA090</p> <p>EFC004CA120</p> <p>EFC004CA200</p>	<p><u>totally PVC-free (PUR Tubing)</u></p> <p><u>totally PVC-free (PUR Tubing) and 30 cm long</u></p> <p><u>totally PVC-free (PUR Tubing) and 60 cm long</u></p> <p><u>totally PVC-free (PUR Tubing) and 90 cm long</u></p> <p><u>totally PVC-free (PUR Tubing) and 120 cm long</u></p> <p><u>totally PVC-free (PUR Tubing) and 200 cm long</u></p>		
<p>EFC004CB150</p> <p>EFC004CB030</p> <p>EFC004CB060</p> <p>EFC004CB090</p> <p>EFC004CB120</p> <p>EFC004CB200</p>	<p><u>totally PVC-free (PUR Tubing) and with rotating male luer lock distal connector</u></p> <p><u>totally PVC-free (PUR Tubing), with rotating male luer lock distal connector and 30 cm long</u></p> <p><u>totally PVC-free (PUR Tubing), with rotating male luer lock distal connector and 60 cm long</u></p> <p><u>totally PVC-free (PUR Tubing), with rotating male luer lock distal connector and 90 cm long</u></p> <p><u>totally PVC-free (PUR Tubing), with rotating male luer lock distal connector and 120 cm long</u></p> <p><u>totally PVC-free (PUR Tubing), with rotating male luer lock distal connector and 200 cm long</u></p>	 <p>rotating male LL</p>	
	<p>Standard bore extension lines with 3-way stopcocks and needle-free access</p> 	 	<p>Carton (41x50x29 cm) 200 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
<p>EFB004QA010 available variants</p> <p>EFB004QA030</p> <p>EFB004QA060</p> <p>EFB004QA090</p> <p>EFB004QA120</p> <p>EFB004QA150</p>	<p>Standard bore extension lines 10 cm long composed by lipid resistant 3-way stopcock with needle-free valves, PVC DEHP-free tube Ø 3,0 x 4,1 mm, male luer lock connector with cap.</p> <p>30 cm long</p> <p>60 cm long</p> <p>90 cm long</p> <p>120 cm long</p> <p>150 cm long</p>		
<p>EFC100B150</p> <p>EFC004QB030</p> <p>EFC004QB060</p> <p>EFC004QB090</p> <p>EFC004QB120</p> <p>EFC100B200</p>	<p><u>totally PVC-free (PUR Tubing) and with rotating male luer lock distal connector</u></p> <p><u>totally PVC-free (PUR Tubing), with rotating male luer lock distal connector and 30 cm long</u></p> <p><u>totally PVC-free (PUR Tubing), with rotating male luer lock distal connector and 60 cm long</u></p> <p><u>totally PVC-free (PUR Tubing), with rotating male luer lock distal connector and 90 cm long</u></p> <p><u>totally PVC-free (PUR Tubing), with rotating male luer lock distal connector and 120 cm long</u></p> <p><u>totally PVC-free (PUR Tubing), with rotating male luer lock distal connector and 200 cm long</u></p>	 <p>rotating male LL</p>	

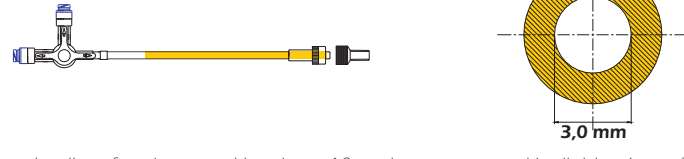Caption:



Reference	Description	Features	Packing
<p>Standard bore extension lines with 3-way stopcocks for photosensitive drugs</p>  <p>EFB005CA010 available variants EFB005CA030 EFB005CA060 EFB005CA090 EFB005CA120 EFB005CA150</p>	<p>Standard bore extension lines for photosensitive drugs 10 cm long composed by lipid resistant 3-way stopcock with caps, PVC DEHP-free tube Ø 3,0 x 4,1 mm, male luer lock connector with cap.</p> <p>30 cm long 60 cm long 90 cm long 120 cm long 150 cm long</p>	<p>   STERILE EO  0425</p>	<p>Carton (41x50x29 cm) 200 pcs. Full pallet (80x120x220 cm) 42 cartons</p>
<p>EFB005CB010 EFB005CB030 EFB005CB060 EFB005CB090 EFB005CB120 EFB005CB150</p>	<p>with rotating male luer lock distal connector with rotating male luer lock distal connector and 30 cm long with rotating male luer lock distal connector and 60 cm long with rotating male luer lock distal connector and 90 cm long with rotating male luer lock distal connector and 120 cm long with rotating male luer lock distal connector and 150 cm long</p>	<p>rotating male LL</p>	
<p>EFC005CA150 EFC005CA030 EFC005CA060 EFC005CA090 EFC005CA120 EFC005CA200</p>	<p><u>totally PVC-free</u> (PUR Tubing) <u>totally PVC-free</u> (PUR Tubing) and 30 cm long <u>totally PVC-free</u> (PUR Tubing) and 60 cm long <u>totally PVC-free</u> (PUR Tubing) and 90 cm long <u>totally PVC-free</u> (PUR Tubing) and 120 cm long <u>totally PVC-free</u> (PUR Tubing) and 200 cm long</p>	<p></p>	
<p>EFC005CB150 EFC005CB030 EFC005CB060 EFC005CB090 EFC005CB120 EFC005CB200</p>	<p><u>totally PVC-free</u> (PUR Tubing) and with rotating male luer lock distal connector <u>totally PVC-free</u> (PUR Tubing), with rotating male luer lock distal connector and 30 cm long <u>totally PVC-free</u> (PUR Tubing), with rotating male luer lock distal connector and 60 cm long <u>totally PVC-free</u> (PUR Tubing), with rotating male luer lock distal connector and 90 cm long <u>totally PVC-free</u> (PUR Tubing), with rotating male luer lock distal connector and 120 cm long <u>totally PVC-free</u> (PUR Tubing), with rotating male luer lock distal connector and 200 cm long</p>	<p> rotating male LL</p>	
<p>Standard bore extension lines with 3-way stopcocks with needle-free access for photosensitive drugs</p>  <p>EFB005QA010 available variants EFB005QA030 EFB005QA060 EFB005QA090 EFB005QA120 EFB005QA150</p>	<p>Standard bore extension lines for photosensitive drugs 10 cm long composed by lipid resistant 3-way stopcock with needle-free valves, PVC DEHP-free tube Ø 3,0 x 4,1 mm, male luer lock connector with cap.</p> <p>30 cm long 60 cm long 90 cm long 120 cm long 150 cm long</p>	<p>   STERILE EO  0425</p>	<p>Carton (41x50x29 cm) 200 pcs. Full pallet (80x120x220 cm) 42 cartons</p>
<p>EFC005QB010 EFC005QB030 EFC005QB060 EFC005QB090 EFC005QB120 EFC005QB150</p>	<p><u>totally PVC-free</u> (PUR Tubing) and with rotating male luer lock distal connector <u>totally PVC-free</u> (PUR Tubing), with rotating male luer lock distal connector and 30 cm long <u>totally PVC-free</u> (PUR Tubing), with rotating male luer lock distal connector and 60 cm long <u>totally PVC-free</u> (PUR Tubing), with rotating male luer lock distal connector and 90 cm long <u>totally PVC-free</u> (PUR Tubing), with rotating male luer lock distal connector and 120 cm long <u>totally PVC-free</u> (PUR Tubing), with rotating male luer lock distal connector and 150 cm long</p>	<p> rotating male LL</p>	

Caption:






















PRO-LONG TUBE - Standard bore extension lines with flow controller

Reference	Description	Features	Packing
	<p>Standard bore extension lines with single scale flow controller</p>	<p>STERILE EO 0425</p>	<p>Carton (41x50x29 cm) 140 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
EFB006AA045	Standard bore extension lines 45 cm long composed by female luer lock connector with cap, PVC DEHP-free tube Ø 3,0 x 4,1 mm, single scale flow controller (0-250 ml), Y injection port (finger protective), male luer lock connector with cap.		
available variants			
EFB006AA060	60 cm long		
EFB006AB045	with rotating male luer lock distal connector	rotating male LL	
EFB006AB060	with rotating male luer lock distal connector and 60 cm long		
EFC006AA045	totally PVC-free (PUR Tubing)		
EFC006AA060	totally PVC-free (PUR Tubing) and 60 cm long		
EFC006AB045	totally PVC-free (PUR Tubing) and with rotating male luer lock distal connector		
EFC006AB060	totally PVC-free (PUR Tubing), with rotating male luer lock distal connector and 60 cm long	rotating male LL	
	<p>Standard bore extension lines with double scale (10-40%) flow controller</p>	<p>STERILE EO 0425</p>	<p>Carton (41x50x29 cm) 140 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
EFB006BA045	Standard bore extension lines 45 cm long composed by female luer lock connector with cap, PVC DEHP-free tube Ø 3,0 x 4,1 mm, double scale (10-40%) flow controller (0-250 ml), Y injection port (finger protective), male luer lock connector with cap.		
available variants			
EFB006BA060	60 cm long		
EFB006BB045	with rotating male luer lock distal connector	rotating male LL	
EFB006BB060	with rotating male luer lock distal connector and 60 cm long		
EFC006BA045	totally PVC-free (PUR Tubing)		
EFC006BA060	totally PVC-free (PUR Tubing) and 60 cm long		
EFC006BB045	totally PVC-free (PUR Tubing) and with rotating male luer lock distal connector		
EFC006BB060	totally PVC-free (PUR Tubing), with rotating male luer lock distal connector and 60 cm long	rotating male LL	
	<p>Standard bore extension lines for photosensitive drugs with double scale (10-40%) flow controller</p>	<p>STERILE EO 0425</p>	<p>Carton (41x50x29 cm) 140 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
EFB021BA045	Standard bore extension lines 45 cm long composed by female luer lock connector with cap, PVC DEHP-free tube Ø 3,0 x 4,1 mm, double scale (10-40%) flow controller (0-250 ml), Y injection port (finger protective), male luer lock connector with cap.		
available variants			
EFB021BA060	60 cm long		
EFB021BB045	with rotating male luer lock distal connector	rotating male LL	
EFB021BB060	with rotating male luer lock distal connector and 60 cm long		
EFC021BA045	totally PVC-free (PUR Tubing)		
EFC021BA060	totally PVC-free (PUR Tubing) and 60 cm long		
EFC021BB045	totally PVC-free (PUR Tubing) and with rotating male luer lock distal connector		
EFC021BB060	totally PVC-free (PUR Tubing), with rotating male luer lock distal connector and 60 cm long	rotating male LL	

Caption:


















Reference	Description	Features	Packing
<p>EFB022AA045</p> <p>Standard bore extension lines with single scale flow controller and needle-free Y access valve</p> <p>Stanadrd bore extension lines 45 cm long composed by female luer lock connector with cap, PVC DEHP-free tube Ø 3,0 x 4,1 mm, single scale flow controller (0-250 ml), Y injection port with needle-free valve, male luer lock connector with cap.</p> <p>available variants</p> <p>EFB022AA060</p> <p>60 cm long</p> <p>EFB022AB045</p> <p>with rotating male luer lock distal connector</p> <p>EFB022AB060</p> <p>with rotating male luer lock distal connector and 60 cm long</p> <p>EFC022AA045</p> <p>totally PVC-free (PUR Tubing)</p> <p>EFC022AA060</p> <p>totally PVC-free (PUR Tubing) and 60 cm long</p> <p>EFC022AB045</p> <p>totally PVC-free (PUR Tubing) and with rotating male luer lock distal connector</p> <p>EFC022AB060</p> <p>totally PVC-free (PUR Tubing), with rotating male luer lock distal connector and 60 cm long</p>		<p>   </p> <p>    </p> <p>0425</p> <p>rotating male LL</p>	<p>Carton (41x50x29 cm) 140 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
<p>EFB022BA045</p> <p>Standard bore extension lines with double scale (10-40%) flow controller and needle-free Y access valve</p> <p>Stanadrd bore extension lines 45 cm long composed by female luer lock connector with cap, PVC DEHP-free tube Ø 3,0 x 4,1 mm, double scale (10-40%) flow controller (0-250 ml), Y injection port (finger protective), male luer lock connector with cap.</p> <p>available variants</p> <p>EFB022BA060</p> <p>60 cm long</p> <p>EFB022BB045</p> <p>with rotating male luer lock distal connector</p> <p>EFB022BB060</p> <p>with rotating male luer lock distal connector and 60 cm long</p> <p>EFC022BA045</p> <p>totally PVC-free (PUR Tubing)</p> <p>EFC022BA060</p> <p>totally PVC-free (PUR Tubing) and 60 cm long</p> <p>EFC022BB045</p> <p>totally PVC-free (PUR Tubing) and with rotating male luer lock distal connector</p> <p>EFC022BB060</p> <p>totally PVC-free (PUR Tubing), with rotating male luer lock distal connector and 60 cm long</p>		<p>   </p> <p>    </p> <p>0425</p> <p>rotating male LL</p>	<p>Carton (41x50x29 cm) 140 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
<p>EFB023BA045</p> <p>Standard bore extension lines for photosensitive drugs with double scale (10-40%) flow controller and needle-free Y access valve</p> <p>Stanadrd bore extension lines 45 cm long composed by female luer lock connector with cap, PVC DEHP-free tube Ø 3,0 x 4,1 mm, double scale (10-40%) flow controller (0-250 ml), Y injection port (finger protective), male luer lock connector with cap.</p> <p>available variants</p> <p>EFB023BA060</p> <p>60 cm long</p> <p>EFB023BB045</p> <p>with rotating male luer lock distal connector</p> <p>EFB023BB060</p> <p>with rotating male luer lock distal connector and 60 cm long</p> <p>EFC023BA045</p> <p>totally PVC-free (PUR Tubing)</p> <p>EFC023BA060</p> <p>totally PVC-free (PUR Tubing) and 60 cm long</p> <p>EFC023BB045</p> <p>totally PVC-free (PUR Tubing) and with rotating male luer lock distal connector</p> <p>EFC023BB060</p> <p>totally PVC-free (PUR Tubing), with rotating male luer lock distal connector and 60 cm long</p>		<p>    </p> <p>    </p> <p>0425</p> <p>rotating male LL</p>	<p>Carton (41x50x29 cm) 140 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>

Caption:


















PRO-LONG TUBE - Standard bore extension lines with in-line filter

Reference	Description	Features	Packing
	Standard bore extension lines with in-line filter 	 	Carton (41x50x29 cm) 140 pcs. Full pallet (80x120x220 cm) 42 cartons
EFB017CA050	Standard bore extension lines 50 cm long composed by female luer lock connector with cap, PVC DEHP-free tube Ø 3,0 x 4,1 mm, 0,2 µm in-line filter (10 cm ²), male luer lock connector with cap.		
available variants			
EFB017CA100	100 cm long		
EFB017CA150	150 cm long		
EFB017DA050	1,2 µm in-line filter (10 cm ²)		
EFB017DB100	100 cm long and with 1,2 µm in-line filter (10 cm ²)		
EFB017DB150	150 cm long and with 1,2 µm in-line filter (10 cm ²)		
EFB017CB050	with rotating male luer lock distal connector	rotating male LL	
EFB017DB050	with rotating male luer lock distal connector and 1,2 µm in-line filter (10 cm ²)		
EFC017CA050	<u>totally PVC-free</u>		
EFC017DA050	<u>totally PVC-free</u> and 1,2 µm in-line filter (10 cm ²)		
EFC017CB050	<u>totally PVC-free</u> and with rotating male luer lock distal connector		
EFC017DB050	<u>totally PVC-free</u> , with rotating male luer lock distal connector and 1,2 µm in-line filter (10 cm ²)	rotating male LL	
	Standard bore extension lines with in-line filter and Y injection port 	 	Carton (41x50x29 cm) 140 pcs. Full pallet (80x120x220 cm) 42 cartons
EFB017AA050	Standard bore extension lines 50 cm long composed by female luer lock connector with cap, PVC DEHP-free tube Ø 3,0 x 4,1 mm, 0,2 µm in-line filter (10 cm ²), robert clamp, Y injection port (finger protective), male luer lock connector with cap.		
available variants			
EFB017BA050	1,2 µm in-line filter (10 cm ²)		
EFB017AB050	with rotating male luer lock distal connector	rotating male LL	
EFB017BB050	with rotating male luer lock distal connector and 1,2 µm in-line filter (10 cm ²)		
EFC017AA050	<u>totally PVC-free</u>		
EFC017BA050	<u>totally PVC-free</u> and 1,2 µm in-line filter (10 cm ²)		
EFC017AB050	<u>totally PVC-free</u> and with rotating male luer lock distal connector		
EFC017BB050	<u>totally PVC-free</u> , with rotating male luer lock distal connector and 1,2 µm in-line filter (10 cm ²)	rotating male LL	
	Standard bore extension lines with in-line filter and Y needle-free access 	 	Carton (41x50x29 cm) 140 pcs. Full pallet (80x120x220 cm) 42 cartons
EFB024AA050	Standard bore extension lines 50 cm long composed by female luer lock connector with cap, PVC DEHP-free tube Ø 3,0 x 4,1 mm, 0,2 µm in-line filter (10 cm ²), robert clamp, Y injection port with needle-free valve, male luer lock connector with cap.		
available variants			
EFB024BA050	1,2 µm in-line filter (10 cm ²)		
EFB024AB050	with rotating male luer lock distal connector	rotating male LL	
EFB024BB050	with rotating male luer lock distal connector and 1,2 µm in-line filter (10 cm ²)		
EFC024AA050	<u>totally PVC-free</u>		
EFC024BA050	<u>totally PVC-free</u> and 1,2 µm in-line filter (10 cm ²)		
EFC024AB050	<u>totally PVC-free</u> and with rotating male luer lock distal connector		
EFC024BB050	<u>totally PVC-free</u> , with rotating male luer lock distal connector and 1,2 µm in-line filter (10 cm ²)	rotating male LL	









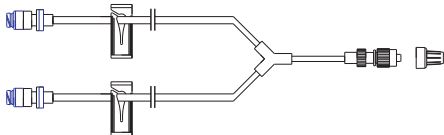



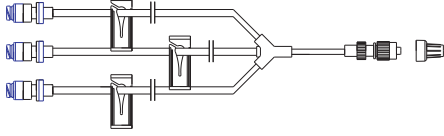



Caption:



Reference	Description	Features	Packing
	<p>Standard bore extension lines for photosensitive drugs with in-line filter</p> 	 <p>STERILE EO  0425</p>	<p>Carton (41x50x29 cm) 140 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
EFB018CA050	Standard bore extension lines 50 cm long composed by female luer lock connector with cap, PVC DEHP-free tube Ø 3,0 x 4,1 mm, 0,2 µm in-line filter (10 cm ²), male luer lock connector with cap.		
available variants			
EFB018CA100	100 cm long		
EFB018CA150	150 cm long		
EFB018DA050	1,2 µm in-line filter (10 cm ²)		
EFB018DB100	100 cm long and with 1,2 µm in-line filter (10 cm ²)		
EFB018DB150	150 cm long and with 1,2 µm in-line filter (10 cm ²)		
EFB018CB050	with rotating male luer lock distal connector	rotating male LL	
EFB018DB050	with rotating male luer lock distal connector and 1,2 µm in-line filter (10 cm ²)		
EFC018CA050	<u>totally PVC-free</u>		
EFC018DA050	<u>totally PVC-free</u> and 1,2 µm in-line filter (10 cm ²)		
EFC018CB050	<u>totally PVC-free</u> and with rotating male luer lock distal connector		
EFC018DB050	<u>totally PVC-free</u> with rotating male luer lock distal connector and 1,2 µm in-line filter (10 cm ²)	rotating male LL	
	<p>Standard bore extension lines for photosensitive drugs with in-line filter and Y injection port</p> 	 <p>STERILE EO  0425</p>	<p>Carton (41x50x29 cm) 140 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
EFB018AA050	Standard bore extension lines 50 cm long composed by female luer lock connector with cap, PVC DEHP-free tube Ø 3,0 x 4,1 mm, 0,2 µm in-line filter (10 cm ²), robert clamp, Y injection port (finger protective), male luer lock connector with cap.		
available variants			
EFB018BA050	1,2 µm in-line filter (10 cm ²)		
EFB018AB050	with rotating male luer lock distal connector	rotating male LL	
EFB018BB050	with rotating male luer lock distal connector and 1,2 µm in-line filter (10 cm ²)		
EFC018AA050	<u>totally PVC-free</u>		
EFC018BA050	<u>totally PVC-free</u> and 1,2 µm in-line filter (10 cm ²)		
EFC018AB050	<u>totally PVC-free</u> and with rotating male luer lock distal connector		
EFC018BB050	<u>totally PVC-free</u> with rotating male luer lock distal connector and 1,2 µm in-line filter (10 cm ²)	rotating male LL	
	<p>Standard bore extension lines for photosensitive drugs with in-line filter and Y needle-free access</p> 	 <p>STERILE EO  0425</p>	<p>Carton (41x50x29 cm) 140 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
EFB025AA050	Standard bore extension lines 50 cm long composed by female luer lock connector with cap, PVC DEHP-free tube Ø 3,0 x 4,1 mm, 0,2 µm in-line filter (10 cm ²), robert clamp, Y injection port with needle-free valve, male luer lock connector with cap.		
available variants			
EFB025BA050	1,2 µm in-line filter (10 cm ²)		
EFB025AB050	with rotating male luer lock distal connector	rotating male LL	
EFB025BB050	with rotating male luer lock distal connector and 1,2 µm in-line filter (10 cm ²)		
EFC025AA050	<u>totally PVC-free</u>		
EFC025BA050	<u>totally PVC-free</u> and 1,2 µm in-line filter (10 cm ²)		
EFC025AB050	<u>totally PVC-free</u> and with rotating male luer lock distal connector		
EFC025BB050	<u>totally PVC-free</u> with rotating male luer lock distal connector and 1,2 µm in-line filter (10 cm ²)	rotating male LL	













Caption:



Reference	Description	Features	Packing
<p>EFB002GB150 available variants EFB002EB200</p> <p>EFC002GB150 EFC002EB200</p>	<p>Monolumen extension lines with small bore</p>  <p>Small bore extension line 150 cm long composed by non-return valve with female luer lock connector with cap, PVC DEHP-free tube Ø 1,5x3,0 mm, blue robert clamp, rotating male luer lock connector with cap. 200 cm long with anti-syphon valve (instead of NRV) and without clamp</p> <p><u>totally PVC-free</u></p> <p><u>totally PVC-free</u> , 200 cm long with anti-syphon valve (instead of NRV) and without clamp</p>	<p> </p> <p>STERILE EO  0425</p> <p>rotating male LL</p>	<p>Carton (41x50x29 cm) 300 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
<p>EFB016EB150 available variants EFC016EB150</p>	<p>Dual lumen extension lines with micro-bore</p>  <p>Micro-bore dual lumen extension lines composed by anti-syphon valve with female luer lock connector with cap, robert clamp, PVC DEHP-free tube Ø 1,0 x 2,5 mm 150 cm long, non-return valve with female luer lock connector with cap, PVC DEHP-free tube Ø 1,0 x 2,5 mm 5 cm long, Y connector, rotating male luer lock connector with cap.</p> <p><u>totally PVC-free</u></p>	<p> </p> <p>STERILE EO  0425</p> <p>rotating male LL</p>	<p>Carton (41x50x29 cm) 200 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
<p>EFB012NB010 available variants EFB012FB010 EFB012EB010</p> <p>EFC012NB010 EFC012FB010 EFC012EB010</p>	<p>Dual lumen extension lines with small bore</p>  <p>Small bore dual lumen extension line 10 cm long composed by female luer lock connector with needle-free valve and non-return valve, slide clamps, PVC DEHP-free tube Ø 1,5 x 3,0 mm, Y connector and rotating male luer lock connector with cap.</p> <p>with female luer lock connector with needle-free valve but without non-return valves</p> <p>with female luer lock connector with non-return valves but without needle-free valves</p> <p><u>totally PVC-free</u></p> <p><u>totally PVC-free</u> and with female luer lock connector with needle-free valve but without non-return valves</p> <p><u>totally PVC-free</u> and with female luer lock connector with non-return valves but without needle-free valves</p>	<p> </p> <p>STERILE EO  0425</p> <p>rotating male LL</p>	<p>Carton (41x50x29 cm) 200 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>
<p>EFB013NB010 available variants EFB013FB010 EFB013EB010</p> <p>EFC013NB010 EFC013FB010 EFC013EB010</p>	<p>Triple lumen extension lines with small bore</p>  <p>Small bore triple lumen extension line 10 cm long composed by female luer lock connector with needle-free valve and non-return valve, slide clamps, PVC DEHP-free tube Ø 1,5 x 3,0 mm, Y connector and rotating male luer lock connector with cap.</p> <p>with female luer lock connector with needle-free valve but without non-return valves</p> <p>with female luer lock connector with non-return valves but without needle-free valves</p> <p><u>totally PVC-free</u></p> <p><u>totally PVC-free</u> and with female luer lock connector with needle-free valve but without non-return valves</p> <p><u>totally PVC-free</u> and with female luer lock connector with non-return valves but without needle-free valves</p>	<p> </p> <p>STERILE EO  0425</p> <p>rotating male LL</p>	<p>Carton (41x50x29 cm) 200 pcs.</p> <p>Full pallet (80x120x220 cm) 42 cartons</p>











Caption:



Reference	Description	Features	Packing
M/TL108N available variants M/TL108NA M/TL99N M/TL99NA M/TP98N M/TP98NA M/TL90N M/TL90NA M/TL108C M/TL108CA M/TL90L M/TL90LA	Disposable 50(60) ml syringe for pump*  <p style="text-align: center;">Standard</p>  <p style="text-align: center;">with filling needle</p> <p>3 pieces 50 (60) ml syringes with B-D Plastipack index with clear barrel and male luer lock connector.</p>	  B-D Plastipack	Box 50 pcs. Carton 300 pcs. Full pallet (80x120x220 cm) 20 cartons without needle 16 cartons with needle
	with 14G filling needle	Braun Omnifix	
	with Braun Omnifix index	Braun Omnifix	
	with Braun Omnifix index and 14G filling needle	Braun Omnifix	
	with Braun Perfusion index (perfusion connector type)	Braun Perfusion	
	with Braun Perfusion index (perfusion connector type) and 14G filling needle	Braun Perfusion	
	with Fresenius Injectomat index	Fresenius Injectomat	
	with Fresenius Injectomat index and 14G filling needle	Fresenius Injectomat	
	with B-D Monoject index	B-D Monoject	
	with B-D Monoject index and 14G filling needle	B-D Monoject	
with Terumo pump index	Terumo		
with Terumo pump index and 14G filling needle	Terumo		
M/ML108N available variants M/ML108NA M/ML99N M/ML99NA M/MP98N M/MP98NA M/ML90N M/ML90NA M/ML108C M/ML108CA M/ML90L M/ML90LA	Disposable 50(60) ml syringe for pump* for photosensitive drugs  <p style="text-align: center;">Standard</p>  <p style="text-align: center;">with filling needle</p> <p>3 pieces 50 (60) ml syringes with B-D Plastipack index with orange barrel and male luer lock connector.</p>	  B-D Plastipack	Box 50 pcs. Carton 300 pcs. Full pallet (80x120x220 cm) 20 cartons without needle 16 cartons with needle
	with 14G filling needle	Braun Omnifix	
	with Braun Omnifix index	Braun Omnifix	
	with Braun Omnifix index and 14G filling needle	Braun Omnifix	
	with Braun Perfusion index (perfusion connector type)	Braun Perfusion	
	with Braun Perfusion index (perfusion connector type) and 14G filling needle	Braun Perfusion	
	with Fresenius Injectomat index	Fresenius Injectomat	
	with Fresenius Injectomat index and 14G filling needle	Fresenius Injectomat	
	with B-D Monoject index	B-D Monoject	
	with B-D Monoject index and 14G filling needle	B-D Monoject	
with Terumo pump index	Terumo		
with Terumo pump index and 14G filling needle	Terumo		
<p>* there is no business agreement or any other kind of agreement between PRO-ACTIVE and pump manufacturer. The above brands are mentioned only for descriptive purpose and to ensure the correct choice/use of the device.</p>			
M/TE99N available variants M/TC99N M/TL98N	Disposable syringe with eccentric luer or catheter cone  <p style="text-align: center;">Eccentric luer slip</p>  <p style="text-align: center;">catheter cone</p> <p>3 pieces 50 (60) ml syringes with clear barrel and eccentric male luer slip connector.</p>	  eccentric luer slip	Carton 300 pcs. for 50 ml 180 pcs. for 100 ml Full pallet (80x120x220 cm) 20 cartons for 50 ml 16 cartons for 100 ml
	with catheter cone	catheter cone	
	100 (120) ml with catheter cone	catheter cone	



Caption:



Reference	Description	Features	Packing
<p>AG-LGC1CC available variants</p> <p>AG-LGC2CC AG-LGC3CC AG-LGC5CC AG-LGC10CC AG-LGC20CC AG-LGC30CC AG-LGC50CC AG-LGC100CC AG-LGC150CC AG-LGC200CC AG-LGC250CC</p>	<p>Glass Syringes with luer slip connector</p>  <p>1 ml Syringes in borosilicate glass (first hydrolitic class) with trasparent barrel, frosted piston with luer connection cone.</p>	<p>   </p> <p>glass luer slip</p>	
<p>AG-LMC1CC AG-LMC2CC AG-LMC3CC AG-LMC5CC AG-LMC10CC AG-LMC20CC AG-LMC30CC AG-LMC50CC AG-LMC100CC AG-LMC150CC AG-LMC200CC AG-LMC250CC</p>	<p>1 ml with nickeled brass luer slip 2 ml with nickeled brass luer slip 3 ml with nickeled brass luer slip 5 ml with nickeled brass luer slip 10 ml with nickeled brass luer slip 20 ml with nickeled brass luer slip 30 ml with nickeled brass luer slip 50 ml with nickeled brass luer slip 100 ml with nickeled brass luer slip 150 ml with nickeled brass luer slip 200 ml with nickeled brass luer slip 250 ml with nickeled brass luer slip</p>	<p>metallic luer slip</p>	
<p>AG-LLC1CC available variants</p> <p>AG-LLC2CC AG-LLC3CC AG-LLC5CC AG-LLC10CC AG-LLC20CC AG-LLC30CC AG-LLC50CC AG-LLC100CC AG-LLC150CC AG-LLC200CC AG-LLC250CC</p>	<p>Glass Syringes with luer lock connector</p>  <p>1 ml Syringes in borosilicate glass (first hydrolitic class) with trasparent barrel, frosted piston with luer lock connection in nickeled brass.</p>	<p>   </p>	



Caption:

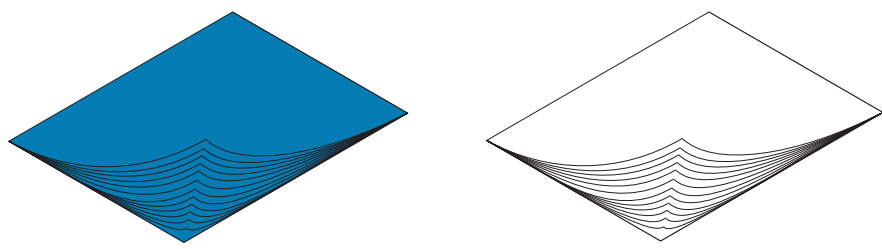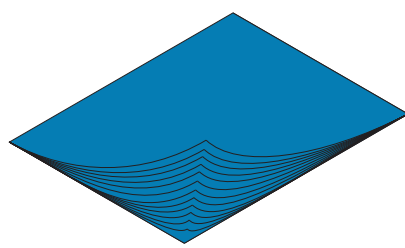

Reference	Description	Features	Packing
<p>NI-03L69B</p> <p>available variants</p> <p>NI-03L41B</p> <p>NI-03L61B</p> <p>NI-03L91B</p> <hr/> <p>NI-03L69A</p> <p>NI-03L41A</p> <p>NI-03L61A</p> <p>NI-03L91A</p>	<p>Anti-mold multilayer adhesive mats</p>  <p>Adhesive-coated mat designed to remove from the bottom of the shoes, wheels or any passing object, dirt and contaminants, thanks to the non-toxic, antimicrobial additive into all adhesive system. Placed at the entrance of clean-room environment, it maintain a cleaner work environment eliminating fiber contaminants and stopping the growth of micro-organism.</p> <p><u>TECHNICAL DATA:</u> Dimension: 60x90 cm Material: Polyethilene Sticky Power: 300g/25mm (±50g) Thickness: First cover layer 40 µm / Disposable sheet layer 35 µm / Last cover layer 140 µm / total thickness 1,23 mm Bacterial agent: Benzoisotiazolina 3-1 (1%) Tensile strength: >1.2 Kg/10mm</p>	<p>white</p> <hr/> <p>blue</p>	<p>30 sheets each mat</p> <p>8 mats each carton</p>
<p>NI-03L69A/BTC</p> <p>available variants</p> <p>NI-03L41A/BTC</p> <p>NI-03L61A/BTC</p> <p>NI-03L91A/BTC</p>	<p>Bactericidal multilayer adhesive mats</p>  <p>Adhesive-coated mat designed to remove from the bottom of the shoes, wheels or any passing object, dirt and contaminants, thanks to the non-toxic, antimicrobial additive into all adhesive system. Placed at the entrance of clean-room environment, it maintain a cleaner work environment eliminating fiber contaminants and stopping the growth of micro-organism.</p> <p><u>TECHNICAL DATA:</u> Dimension: 60x90 cm Material: Polyethilene Sticky Power: 300g/25mm (±50g) Thickness: First cover layer 40 µm / Disposable sheet layer 45 µm / Last cover layer 140 µm / Total Thickness 1,53 mm Bacterial agent: Biomaster (silver based biocide) bactericidal formulation Tensile strength: >1.2 Kg/10mm Temperature resistance: +70°C-48h / -13°C-48h</p>	<p>silver ion based bactericidal agent</p>	<p>30 sheets each mat</p> <p>8 mats each carton</p>

Caption:

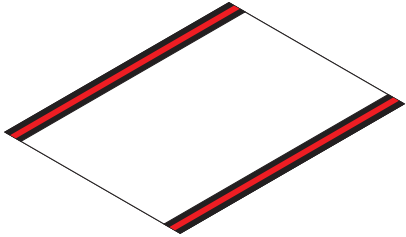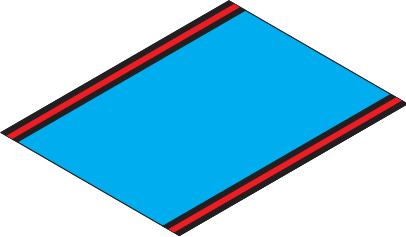


Reference	Description	Features	Packing
<p>Dimensions and reference by request (height up to 200 cm / lenght up to 1000 cm)</p>	<p>Anti-mold washable adhesive mats</p>  <p>Adhesive-coated whasable mat designed to remove from the bottom of the shoes, wheels or any passing object, dirt and contaminants. Placed at the entrance of clean-room, hospital and food industries controlled environments, it maintain a cleaner work environment eliminating fiber contaminants and stopping the growth of micro-organism. This mat is antistatic (ISO284 & 21178), High Conductive (ISO284 & 21178), food approved (FDA21 cfr & Eu 10/2011) and flame retardant (ISO 430). <u>TECHNICAL DATA</u> Material: PVC Thickness: 4,60 ±0,1 mm Weight: 5,50 Kg/m² ±10% Hardness: 72 ±3 Shore A - Din 53505 Bacterial agent: Biomaster detergent AT100 Temperature resistance (Long term):-10°C/70°C Temperature resistance (Short term):-15°C/80°C Daily maintenance: clean the mats with water and antibacterial deterget using a squeegee Weekly bactericidal effect Maintenance: Spray the mat with Biuomaster detergent AT100 and let it dry. Shelf life: three years (considering use of pedestrian and light wheeled traffic)</p>	<p><u>silver ion based bactericidal agent</u></p> <p>white</p>	
<p>Dimensions and reference by request (height up to 200 cm / lenght up to 1000 cm)</p>	<p>Bactericidal washable adhesive mats</p>  <p>Adhesive-coated whasable mat designed to remove from the bottom of the shoes, wheels or any passing object, dirt and contaminants. Placed at the entrance of clean-room, hospital and food industries controlled environments, it maintain a cleaner work environment eliminating fiber contaminants and stopping the growth of micro-organism. This mat is antistatic (ISO284 & 21178), High Conductive (ISO284 & 21178), food approved (FDA21 cfr & Eu 10/2011) and flame retardant (ISO 430). The antibacterial properties of the surfaces are designed to prevent the growth of organisms. So, the organisms cannot be transferred during the transition. Tests have demonstrated that the active substances are effective to neutralize rapidly many common organisms. Unlike other non-antimicrobial products, F10 / PVCXCON DB20 AB provides a 100% protection due to its effective formula. The antibacterial properties are in accordance with ISO 22196: 2011. <u>TECHNICAL DATA</u> Material: PVC EXCON DB20AB Thickness: 3,0 ±0,1 mm Weight: 3,40 Kg/m² ±10% Hardness: 72 ±3 Shore A - Din 53505 Temperature resistance (Long term):-10°C/70°C Temperature resistance (Short term):-15°C/80°C Daily maintenance: clean the mats with water and antibacterial deterget using a squeegee Shelf life: three years (considering use of pedestrian and light wheeled traffic)</p>	<p><u>silver ion based bactericidal agent</u></p> <p>blue</p>	

Caption:

[PRO-ACTIVE S.r.l.](#)

[ADDRESS: VIALE DEL COMMERCIO, 12 - 45100 ROVIGO - ITALY](#)

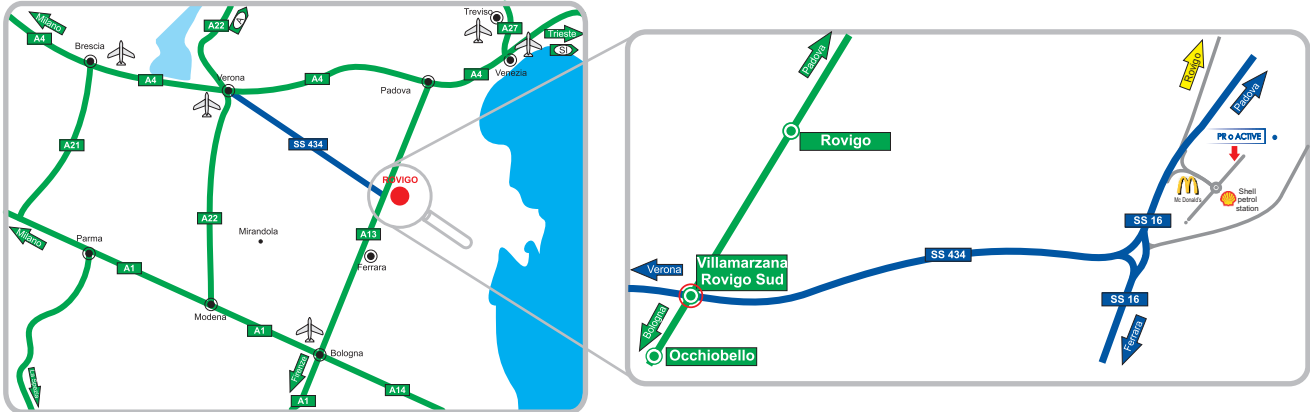

[TELEPHONE: +39.0425.491087](#)

[FAX: +39.0425.490101](#)

[E-MAIL: info@proactivesrl.it](mailto:info@proactivesrl.it)

[Website: www.proactivesrl.it](http://www.proactivesrl.it)

[COMPANY DATA](#)

CAP. STOCK 90.000,00 €

VAT: IT01248310292

BANK CODE: Banca Intesa Sanpaolo - IBAN: IT 92 F 03069 12213 100000000421 - BIC/SWIFT: BCITITMM

